


# Heavy Duty - High Power ELCIs 60A



24520 001-1

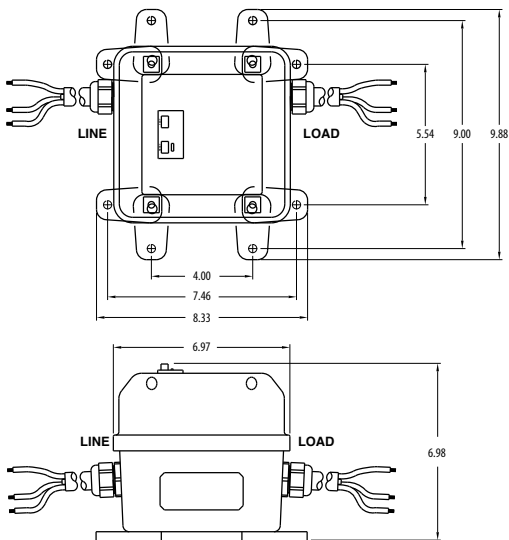

## Heavy Duty - High Power ELCIs - 60A

Configured for both in-line and bulk head mount. Engineered to trip within 25 milliseconds. Protects:

- ▶ Motors
- ▶ Pumping Systems
- ▶ Pressure Washers
- ▶ Manufacturing Equipment
- ▶ Welders
- ▶ Hoists

Has 2' of cable on both line and load side. To prevent equipment startup after ELCI trips, manual reset required. Will reset on power restoration following disruption of primary power.

### FEATURES

#### 24520 001-1

- ▶ Volts/Amps: 120V/60A
- ▶ Cord Gauge: 4/3 AWG
- ▶ Trip Level: 10 mA
- ▶ Single Phase

#### 25560 001-1

- ▶ Volts/Amps: 380V/60A
- ▶ Cord Gauge: 4/4 AWG
- ▶ Trip Level: 30 mA
- ▶ Three Phase

#### 24530 001-1

- ▶ Volts/Amps: 240V/60A
- ▶ Cord Gauge: 4/4 AWG
- ▶ Trip Level: 10 mA
- ▶ Three Phase

### TECHNICAL DATA

<b>Response time for ground fault</b>	25mS - typical
<b>Frequency</b>	50 / 60 Hz
<b>Endurance</b>	3,000 operations minimum
<b>Overload Current</b>	six times rated current
<b>Operating temperature range</b>	-20°C to +40°C
<b>Insulation voltage</b>	1500 VRMS - 1 Min.
<b>Power On indication</b>	lighted indicator
<b>Drop out voltage</b>	60% rated voltage - typical
<b>Reset type</b>	auto
<b>Connection type</b>	flying leads
<b>Enclosure</b>	NEMA 4 polymer