



Heyco® Double D Hole Plugs



For Mounting Holes with Flats
Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)



PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
C		D		Black	White		A		B	
Mounting Hole Dia.		To Prevent Rotation				Head Diameter		Overall Height		
in.	mm.	in.	mm.			in.	mm.	in.	mm.	
.375	9,5	.345	8,8	2617	2618	DP 375*	.47	11,9	.41	10,3
.437	11,1	.390	9,9	2488	2489	DD 437-390	.53	13,5		
.500	12,7	.445	11,3	2491	2492	DD 500-445	.55	14,7		
.562	14,3	.530	13,5	2494	2495	DD 562-530	.66	16,7		
.625	15,9	.550	14,0	2497	2498	DD 625-550	.73	18,5		
.750	19,1	.625	15,9	2503	2504	DD 750-625	.92	23,4	.45	11,5
.875	22,2	.770	19,5	2509	2510	DD 875-770	1.02	25,8		
				2511	-	DD 875-770-9**	.94	23,8		
1.109	28,2	1.000	25,4	2717	2718	DD 1109-1000	1.22	30,9	.48	12,1
2.000	50,8	1.875	47,6	2959	2963	DD 2000-1875	2.17	55,1		

Standard colors black and white. Consult Heyco for other colors.
*On installation, DP 375 Locking Fingers must be aligned with Mounting Hole Flats.
**Smaller than standard Head Diameter, for clearance situations.

- Close unwanted Strain Relief mounting holes or other double faced or Double D holes punched or molded with two opposing flats.
- Convex, matte finish head tapers to a thin edge.
- Quick and easy installation.
- Lock firmly in panels up to .125" (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062" (1,6 mm). Thickness may vary.

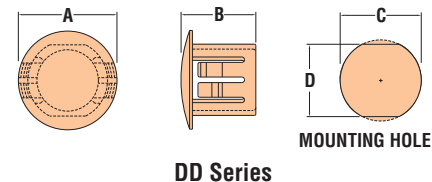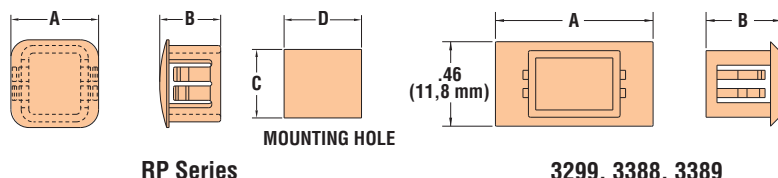

Heyco® Rectangular Blanking & Connector Port Plugs

Multiple Locking Steps for Various Panel Thicknesses

Maximum Thickness	PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS				
	C		D				A	B			
in.	mm.	Length	Width	Black		Head Dimensions		Overall Height			
		in.	mm.	in.	mm.	in.	mm.	in.	mm.		
.04	1,0	.27	6,9	.29	7,4	2512	RP 69-74*	.37 x .37	9,4 x 9,4	.33	8,4
.14	3,5	.37	9,5	.51	13,0	3299	RP 95-130-1**	.63	16,0	.41	10,5
						3388	RP 95-130**	.46 x .87	11,8 x 22		
				3389	RP 95-260**	.46 x 1.38	11,8 x 35				
.10	2,5	.45	11,5	.51	13,9	1890	RP 115-139	.58 x .58	14,7 x 14,7	.40	10,2
.16	4,0	.69	17,5	.69	17,5	1892	RP 175-175	.83 x .83	21,1 x 21,1	.47	11,9

Standard color black. Consult Heyco for other colors. *Single locking step for Panel Thickness up to .04" (1,0 mm).
** Connector port sizes.

- Blank unused rectangular panel holes.
- **PN 1890** - UR Recognized under the Component Program of Underwriters' Laboratories File E15331.
- **PN 1892** - UR Recognized under the Component Program of Underwriters' Laboratories File E51579 and CSA Certified by the Canadian Standards Association File 8919.



Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriter Laboratories File E51579 (DD only)
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)

Quick Specs