

02390

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	26 AWG 7/34 STRANDED TINNED COPPER	.019"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.039"
PAIR:	(2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A PAIR	.078"
SHIELD:	AN OVERALL ALUMINUM POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) SHALL BE APPLIED OVER THE TWISTED PAIR AND SHALL INCLUDE A 26 AWG STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE.	.081"
JACKET:	POLYVINYLCHLORIDE, BLACK, .032" NOM. WALL THICKNESS	
	OVERALL CABLE DIAMETER	.145"

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	10.9 LBS.

3) ELECTRICAL CHARACTERISTICS:	
CAPACITANCE, MUTUAL, NOM.	31.2 PF/FT.
CAPACITANCE, GROUNDED, NOM.	57.7 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B258.	42.6 Ω/1000'


4) AGENCY APPROVALS:  
 (UL) TYPE CM  
 UL AWM 2464  
 CSA AWM FT4

5) APPLICATION:  
 RoHS COMPLIANT MATERIALS.

6) PRINT: (WHITE PRINT)  
 QUABBIN P/N 02390 (UL) TYPE CM 26 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- **(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK X 2. WHITE

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

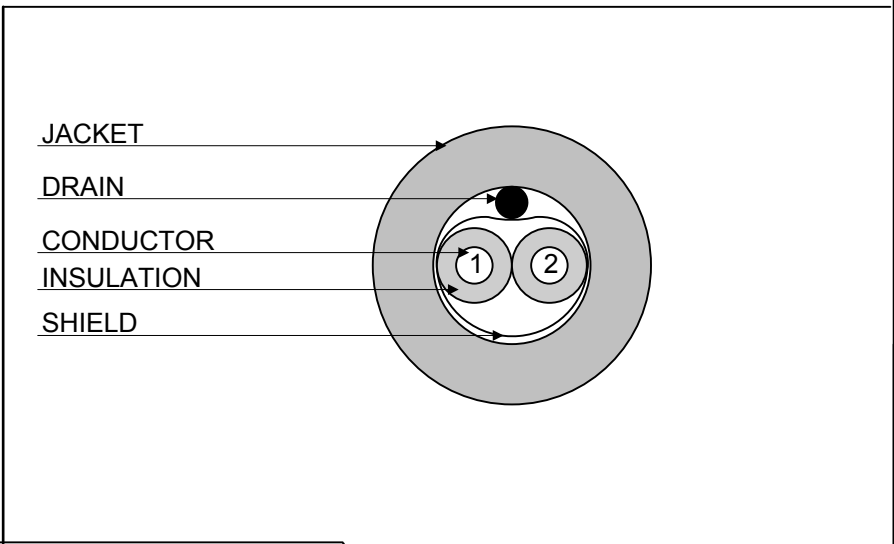

REVISION 01	DATE:	DRAWN <i>B. Duczyski</i> 1/10/11	
REVISED BY		CHECKED <i>G. Munnere</i> 01/10/11	
CHECKED		CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 2/C (1 PR) 26 AWG PVC/PVC SHIELDED CABLE -- TYPE CM, AWM 2464, CSA AWM FT4
			QUABBIN P/N 02390 1 OF 1