



DESC: 26/3 AWM 2095 VW-1 80C 300V

DWG NO: FAWM263-005

SCALE: 35x

DATE: 07/9/10

DR. BY: C MORTON

NWI NO: FAWM263-005


NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

CUSTOMER: IEWC

CUSTOMER P/N: TBD

ITEM	SPECS.
A.	26 GAUGE 19x.004TC STRANDING OD: .0189±.0004"
B.	6 MILS SRPVC INSULATION 5 MILS MIN INSULATION UL 10071 OD: .032±.001"
C.	TALC
D.	15 MILS PRESSURED PVC JACKET 12 MILS MIN JACKET JACKET COLOR: BLACK CABLE IS UL AND CSA

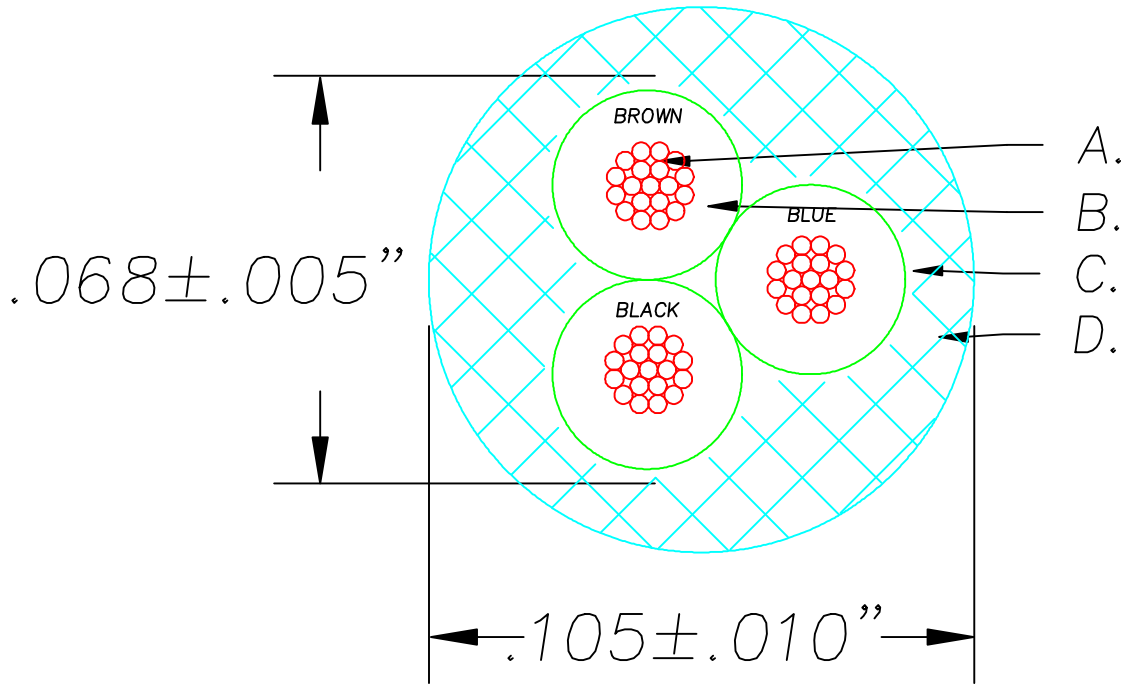

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
FLEXIBILITY IS CRITICAL - BEND RADIUS 8X THE CABLE OD.
BENDING RADIUS = .84 INCHES. THE MORE FLEXIBLE THE WIRE THE BETTER.

CORE DIMENSIONS FOR INTERNAL USE ONLY

LEGEND: CANFIELD CONNECTOR W1042
I/II A/B 80C 300V FT1

RU AWM E54661 80C VW-1 300V CSA AWM LL54185

INSUL MATERIAL FROM PVC/AWM 1873	B	07/12/10	GES	
INITIAL RELEASE	A	07/09/10	CJM	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL