

4 Cond Flexible Control Cable Canfield W-1061

| Revisions | |
|-----------|------|
| Rev. | Date |
| | |
| | |

Cable Description 4 Cond 26 AWG Multi-Conductor Cable

Conductors 26 (26/40) Bare Copper to ASTM B 33-74

Conductor O.D.: 0.021" (0,5334mm)

Insulation: PVC

Insul. Thickness: 0.010" (0,254mm)

O.D. over Insul.: 0.041" (0,104mm)

Color Code: Brown + White + Black + Blue

Cable: Cable (Twist) 4 Conductors


Jacket: Pressure extrude soft black PVC jacket. Apply talc as a release agent. Flood jacket around insulators. Jacket must be round.

Jacket Thickness: 0.015" (0,0381mm)

Cable Diameter: 0.115" +/- .010" (Critical) (0,292mm)

Surface Print white E174416 UR AWM 80C 150 VW-1 CRU AWM CANFIELD CONNECTOR W1061 26/4

Bend Radius: 8 Times or less cable OD BR= .92"

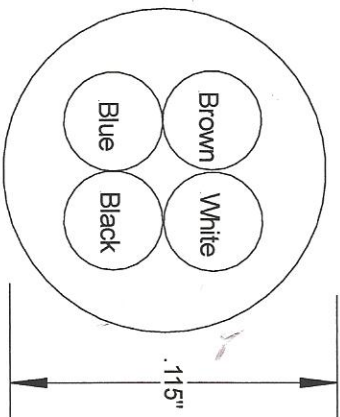

APPROVED

M. R. Phillips

M. R. PHILLIPS

12/4/2012

Product Specification

| | | |
|-----------------------|----------------------|------|
| Drawn by: | Product Description: | Rev: |
| <i>M. R. Phillips</i> | W-1061 4 Cond Cable | |
| Date: | Drawing No. | |
| Dec 4, 2012 | | |