


4 Cond. 26 AWG OAFS & Drain Control Cable

Conductors 26 7/34 TC to ASTM B 33-74
Conductor O.D.: 0.019"
Insulation: PVC
Insul. Thickness: 0.010"
O.D. over Insul.: 0.039"
Color Code: Black, White, Blue, Red
Drain Wire: 22 7/30 TC
Shield: Overall Aluminum Mylar Foil Shield (In)
Cable: Bunch Cable 4 Conductors
Jacket: Premium Grade Chrome Gray PVC
Jacket Thickness: 0.035"
Cable Diameter: 0.168"
Ratings: -20C + 105C 300 Volt RoHS and Reach
Print: E174416 RU AWM STYLE 2517 105C 300V VW-1 CSA
 LL-109360 CSA AWM I/II A/B FT-1

Revisions		
Rev.	Description	Date

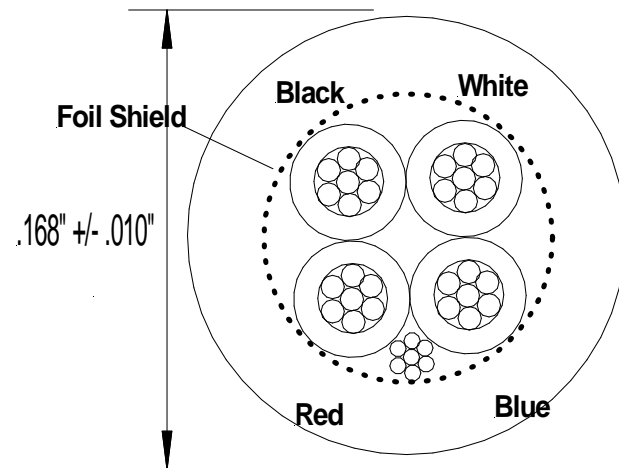

Product Specification		
Drawn by: <i>Brian Stanton</i>	Product Description: 4C 26 (7) PVC Cable	
Date: 9/11/12	Drwg No To be determined	Rev: