


CONDUCTOR (5 TOTAL) - 26 AWG 19/38 AWG TINNED COPPER INSULATED WITH .010" NOMINAL WALL OF 105C PVC TO A NOMINAL O.D. OF .039"
 - 5 CONDUCTOR TOTAL COLOR CODED AS FOLLOWS:
 * SEE DIAGRAM BELOW

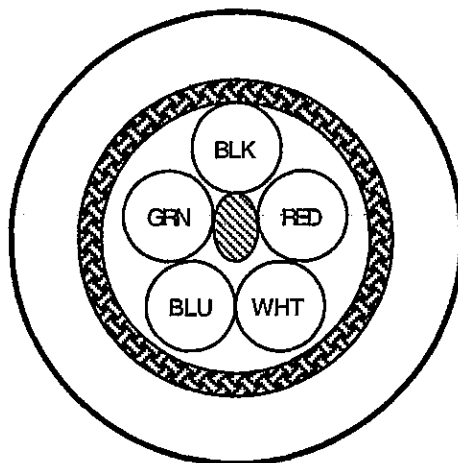

NOTES:

- FIBRALATED POLYPROPYLENE FILLER AS REQUIRED FOR ROUNDNESS
- OVERALL 38AWG 95% COVERAGE TINNED COPPER BRAID SHIELD
- OVERALL .020" WALL BLACK 105C TPE JACKET TO .162" NOMINAL FINAL DIAMETER
- MANUFACTURER'S I.D. THREAD PULLED UNDER JACKET
- JACKET ADHESION: MINIMAL JACKET SLIDE ALONG BRAID ALLOWED

DATA GUIDE

CABLE CORP.

ONE ERNRIC PLACE
 560 MAIN STREET
 GARDNER, MA 01440
 978-632-0900

REV	DESCRIPTION	DATE	APP.
1	MODIFICATIONS	5/18/09	
0	FIRST ISSUE	2/13/09	

TITLE		
5/C 26 AWG BRAID (PVC/TPE)		
SCALE	P/N	REV
N/A	09B11-3	
DATE	DRN. BY	APP. BY
2/09	WJD	