

DESCRIPTION: 26/6 CABLE 90C 300V

CUSTOMER: IEWC

CUSTOMER P/N: 2606C-0NW

NWI P/N: FCAB266-019

DRAWN BY: DP LANGER

UNITS: IN



SCALE: 24:1

DWG NO: 53810-1

DATE: 12/10/2014 REV: A

ITEM	SPECIFICATIONS
A.	26 GAUGE 19x38TC UNILAY
B.	5.5 MIL FEP INSULATION 105C 300V 4 MIL MIN. FEP INSULATION O.D. .031 ±.001
C.	POLY FILLER
D.	TISSUE PAPER SEPARATOR
E.	20 MIL PRESSURED TPU JACKET 90C 300V 15 MIL MIN. BLACK POLYURETHANE JACKET NO AGENCY APPROVALS
ROHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU	

CORE DIMENSIONS FOR INTERNAL USE ONLY

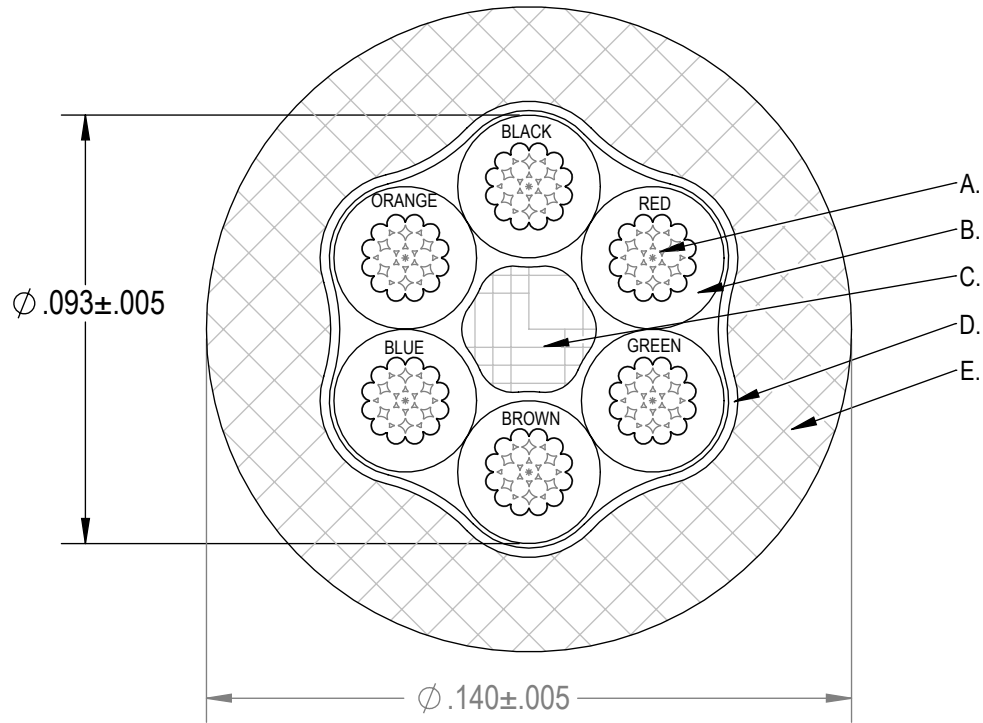

ISOMETRIC VIEW FOR REFERENCE ONLY



This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 26/6 CABLE 90C 300V		UNITS: IN	SCALE: 60:1
CUSTOMER: IEWC	NWI P/N: FCAB266-019	DWG NO: 53810-1	
CUSTOMER P/N: 2606C-0NW	DRAWN BY: DP LANGER	DATE: 12/10/2014	REV: A

ELECTRICAL REQUIREMENTS  
NONE SPECIFIED

END CUSTOMER PART NUMBER: 203088 Rev B



MECHANICAL REQUIREMENTS

JACKET TIGHTNESS TESTING REQUIRED  
Jacket must have < .010" of pull back when tested per customer "Pull Back" Procedure

INITIAL RELEASE	A	12/10/14	DPL
REVISION RECORD	REV.	REV DATE	APR
REVISIONS			