

9306

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 26 AWG 7/34 STRANDED TINNED COPPER .019"
 INSULATION: POLYVINYLCHLORIDE, .007" NOM. WALL THICKNESS .033"
 PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS .066"
 CABLE: (3) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE .103"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .019" NOM. WALL THICKNESS
 OVERALL CABLE DIAMETER .155"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C
 WT./M', NOM., NET. 11.8 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 19 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 39.7 Ω/1,000'
 IMPEDANCE, CHARACTERISTIC, NOM 100 Ω


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM

5) APPLICATION:
 CATEGORY 3 JUMPER CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN DATAMAX P/N 9306R -- (UL) TYPE CM 26 AWG -- PATCH CORD/JUMPER CAT 3 -- RoHS --
 (LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)

7) COLOR CODE: (LONGITUDINAL STRIPE)
 1. WHITE/BLUE X BLUE
 2. WHITE/ORANGE X ORANGE
 3. WHITE/GREEN X GREEN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

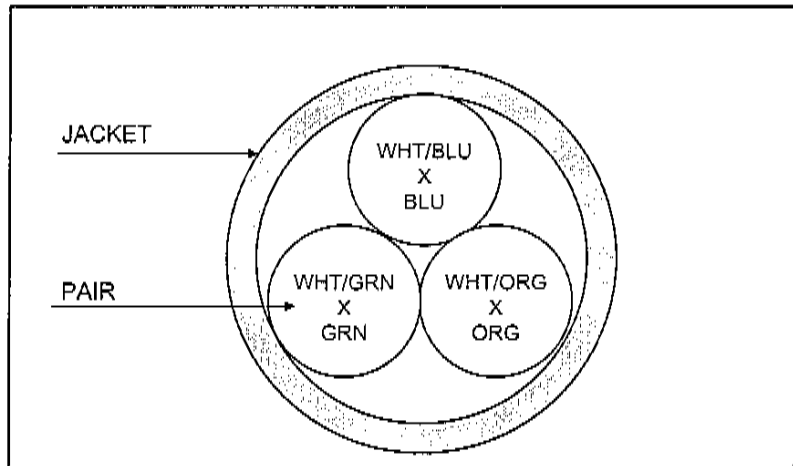

REVISION 07	DATE:	DRAWN S. ADDIE 7/12/96	
REVISED BY B. Duszynski	12/17/09	CHECKED L. RIVERNIDER 7/12/96	
CHECKED G. Momo	12/17/09	CHECKED M. PERRERO 7/12/96	
CHECKED		CUSTOMER APPROVAL DATE: 12-18-19	TITLE PATCH CABLE FOR CAT 3
			QUABBIN P/N 9306 1 OF 1

