



DESC: 26/6 CABLE 80°C 300V

DWG NO: 2606C010

SCALE: 30x

DATE: 4/26/05

DR. BY: DP LANGER

NWI NO: FCAB266-009


CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: 2606COFS-ONW

ITEM	SPECS.
A.	26 GAUGE 7x.0063TC CONCENTRIC O.D. .019±.001"
B.	9 MILS PVC INSULATION 80°C 300V 7 MILS MIN. PVC INSULATION O.D. .041±.002"
C.	POLY FILLER
D.	ALUMINUM FOIL SHIELD; FOIL IN 25% MIN. OVERLAP 100% COVERAGE
E.	26 GAUGE 7x.0063TC DRAIN
F.	25 MILS TUBED PVC JACKET 80°C 300V 20 MILS MIN. PVC JACKET BLACK JACKET CABLE IS NOT UL OR CSA APPROVED

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

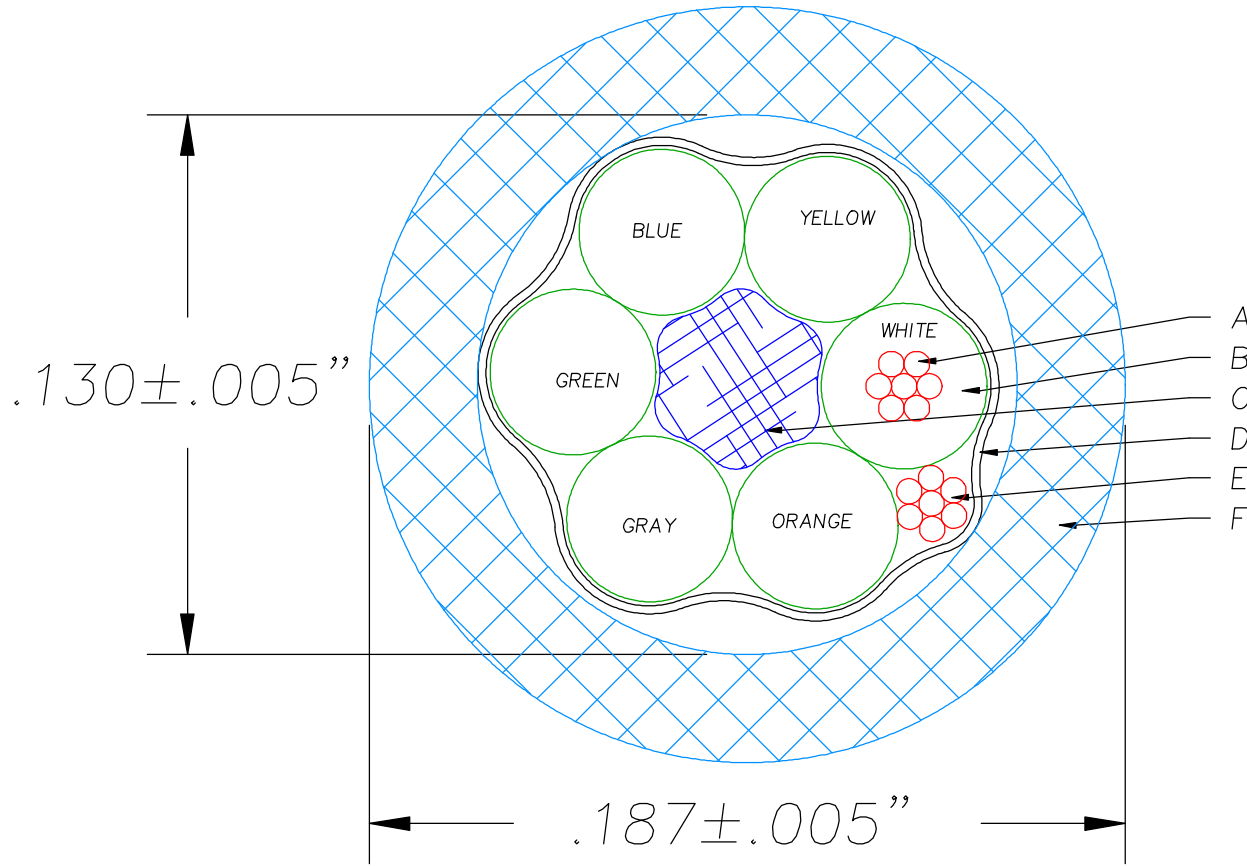

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

INITIAL RELEASE	A	4/26/05	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL