


Attor: Matt Plewa

262 957 1634

SY#	ECO NUMBER	DATE	ASMP
00	ECO NONE	11-22-06	JFZ
01	ECO NONE	12-8-06	JFZ

21048 SHEET 1 OF 1

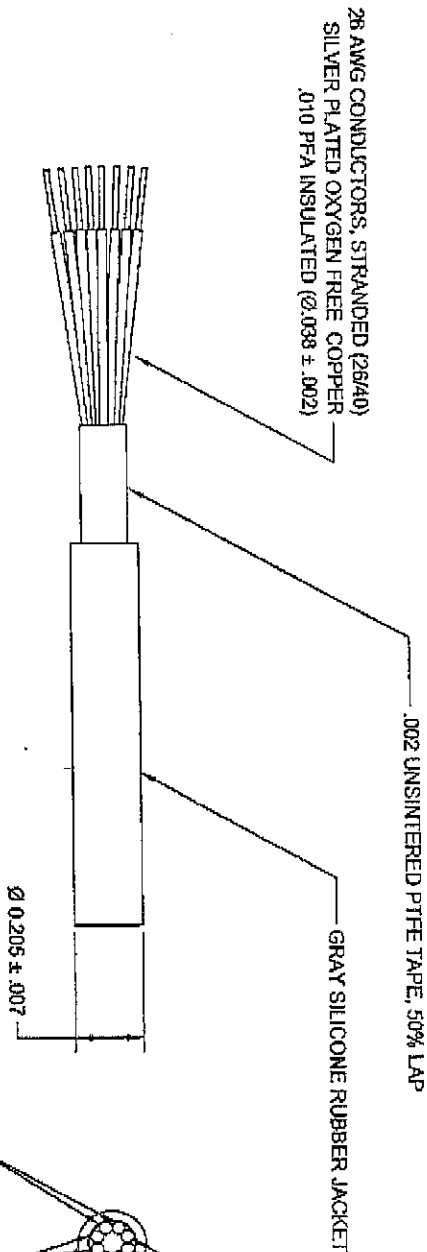

NOTES:

1. CONDUCTORS: 26 AWG STRANDED (26/40) SILVER PLATED OXYGEN FREE COPPER, PFA INSULATED .010 THICK (Ø .038 ± .002).
2. NUMBER OF CONDUCTORS: EIGHT 26 AWG SINGLES AROUND LS POLYESTER FILLER COVERED BY .002 UNSINTERED PTFE TAPE, 50% LAP.
3. JACKET: .080 THICK GRAY SILICONE RUBBER JACKET TO MEET OVERALL CABLE DIAMETER OF .205 ± .007.
4. COLORS: 2 RED, 2 WHITE, 2 BLACK, 2 GREEN.
5. TEMPERATURE RATING: -50 TO 135°C.
6. MINIMUM LENGTH: 160 FEET, LENGTHS TO BE NOTED ON SPOOL.

		<b>BURNS ENGINEERING</b>	
SCALE	N.T.S.	CABLE & CONDUCTOR	
DATE	JFZ 12-8-06	TEFLON INSULATED CONDUCTOR	
CHKD	JFZ 12-8-06	SILICONE JACKETED	
APPR	JFZ 12-8-06		
DIMENSIONS IN INCHES		SHEET 1	REV 05
		SIZE A	QUANTITY 21048