



DESC: 26/9 (1 PAIR/7 SINGLES) CABLE 105°C (-50°C) 300V

DWI NO: 2609C004

SCALE: 20x

DATE: 11/16/05

DR. BY: DP LANGER

NWI NO: FCAB269-014

CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: 2609C-0NW


ITEM

SPECS.


- A. 26 GAUGE 7x.0063TC CONCENTRIC  
O.D. .019±.001"
- B. 9 MILS TPE INSULATION 105°C (-50°C) 300V  
7 MILS MIN. TPE INSULATION  
O.D. .041±.002"
- C. SUB ASSEMBLY TWISTED PAIR
- D. POLY FILLER FILLER IS OPTIONAL
- E. CLEAR MYLAR WRAP  
20% MIN. OVERLAP 100% COVERAGE
- F. TISSUE PAPER SEPARATOR
- G. 30 MILS PRESSURED TPE JACKET 105°C 300V  
24 MILS MIN. TPE JACKET BLACK JACKET  
CABLE IS NOT UL OR CSA APPROVED

SUB ASSEMBLY TWISTED PAIR

- A. 26 GAUGE 7x.0063TC CONCENTRIC  
O.D. .019±.001"
- B. 9 MILS TPE INSULATION 105°C (-50°C) 300V  
7 MILS MIN. TPE INSULATION  
O.D. .041±.002"

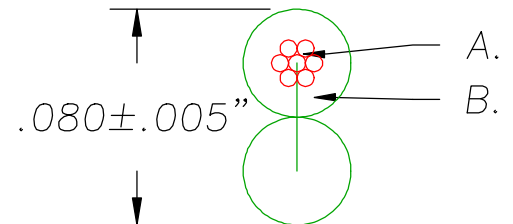

COLOR ROTATION ON PAIR WILL VARY IN RELATIONSHIP TO OVERALL ROTATION

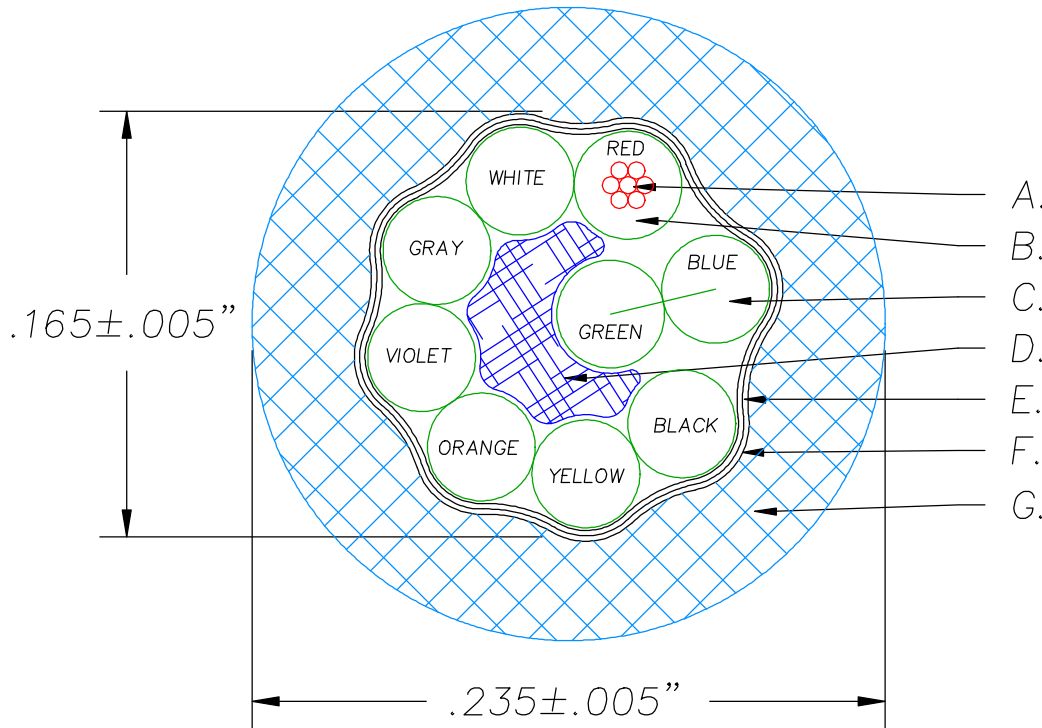

**NORTHWIRE RESTRICTED**

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

**MECHANICAL REQUIREMENTS:**

NONE SPECIFIED

**ELECTRICAL REQUIREMENTS:**

NONE SPECIFIED

INITIAL RELEASE	A	11/16/05	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL