

LEONI Elocab Ltd.


258 McBrine Drive
Kitchener, Ontario, Canada
N2R 1H8
Tel: +1 519-893-1155
Fax: +1 519-893-2766
E-Mail: infocables@leoni.com
www.leoni.com



Round Cable

4 Feb. 2011

ERK 39651 Rev. 1

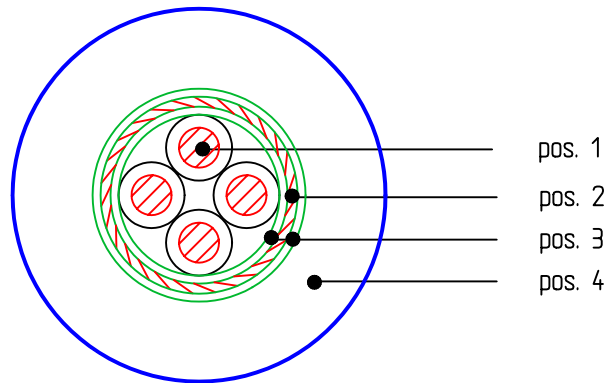

nom. cable diameter 3.7 mm = 0.146"

max. cable diameter 3.9 mm = 0.154"


LEONI Elocab Ltd.

258 McBride Drive
 Kitchener, Ontario, Canada
 N2R 1H8
 Tel: +1 519-893-1155
 Fax: +1 519-893-2766
 E-Mail: infocables@leoni.com
 www.leoni.com



4 Feb. 2011

Round Cable**ERK 39651 Rev. 1**

<u>Pos 1</u>	4 insulated wires conductor insulation colour	0.093 mm ² / AWG 28 (19 x 0.08 mm) tin plated copper TPE red, orange, green, black
<u>Pos 2</u>	screen conductor	served wire shield (0.08 mm) tin plated copper optical coverage min. 90%
<u>Pos 3</u>	binders	polyester
<u>Pos 4</u>	outer jacket material colour print	flame retardant, halogen free polyurethane yellow (matte) LEONI ELOCAB LTD.  E47543EC 90C 30V FT1 AWM I/II A/B CSA LL107672 CE

Technical Data:

UL Style 20671 30V 90°C
 CSA approved to C22.2 NO 210 30V 90°C, FT1
 meets CE standard guidelines
 RoHS compliant

operating voltage:	30 V
test voltage conductor/conductor:	1500 V/DC
test voltage conductor/shield:	1000 V/DC
operating temperature:	-50°C to + 90°C [-58°F to +194°F]
weight:	16 g/m = 11 lbs/1000ft

Bending Radius:

fixed installation:	2 x diameter
minimum bending radius at continuous flex:	5 x diameter
best bending radius at a continuous flex:	10 x diameter

CABLE IS USED IN LENGTHS OF: (please specify) _____ **ft / metres**

** cable will be shipped in random factory lengths unless otherwise specified

REVIEWED AND APPROVED: COMPANY NAME: _____
 SIGNATURE: _____
 NAME: _____
 DATE: _____