

DESCRIPTION: 28/5 CABLE 90C 300V

CUSTOMER: IEWC

CUSTOMER P/N: 2805C-0NW

NWI P/N: FCAB285-005

DRAWN BY: DP LANGER

UNITS: IN

SCALE: 32:1

ITEM

SPECIFICATIONS

DWG NO: 53137-3



DATE: 10/25/2014

REV: A

- A. 28 GAUGE 19x40TC UNILAY
- B. 5 MIL FEP INSULATION 105C 300V
4 MIL MIN. FEP INSULATION
O.D. .026 ±.001"
- C. NYLON FILLER
- D. TISSUE PAPER SEPARATOR
- E. 20 MIL PRESSURED TPU JACKET 90C 300V
15 MIL MIN. BLACK POLYURETHANE JACKET
NO AGENCY APPROVALS

ROHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU

CORE DIMENSIONS FOR INTERNAL USE ONLY

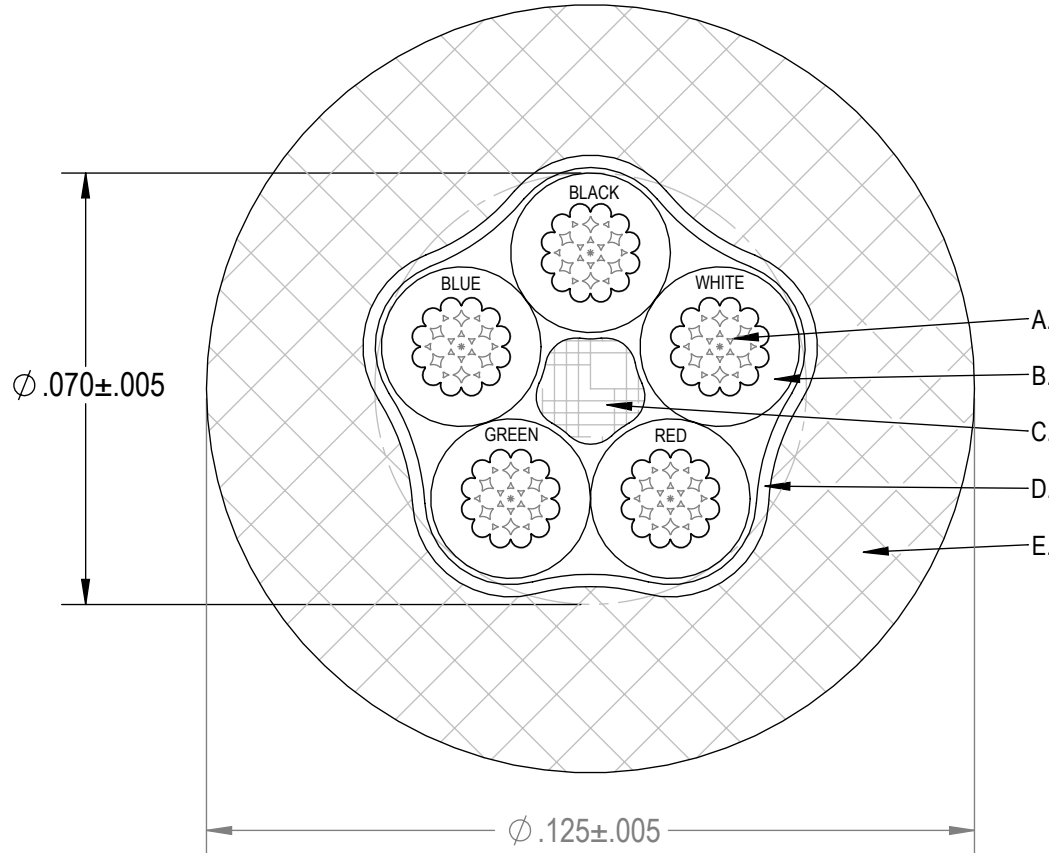

ISOMETRIC VIEW
FOR REFERENCE ONLY

LEGEND SPECIFICATIONS
200566 5C28

WHITE INK PRINT



This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 28/5 CABLE 90C 300V

UNITS: IN

SCALE: 60:1

ELECTRICAL REQUIREMENTS

CUSTOMER: IEWC

NWI P/N: FCAB285-005

DWG NO: 53137-3

NONE SPECIFIED

CUSTOMER P/N: 2805C-0NW

DRAWN BY: DP LANGER

DATE: 10/25/2014

REV: A

END CUSTOMER PART NO: 200566 Rev D



MECHANICAL REQUIREMENTS

JACKET TIGHTNESS TESTING REQUIRED

INITIAL RELEASE	A	10/25/14	DPL
REVISION RECORD	REV.	REV DATE	APR
REVISIONS			