



DESC: 28/5 CABLE 80°C 300V GRAY

NWI NO: 18462002

SCALE: 25x

DATE: 09/08/97

DR. BY: KJ RECTOR

NWI RELEASE LEVEL:

ITEM


SPECS.

- A. 28 AWG 7X.005TC CONCENTRIC
OD .015±.001"
- B. 6 MIL NOMINAL POLYPROPYLENE INSULATION 80°C
4 MIL MINIMUM POLYPROPYLENE INSULATION 300V
OD .029±.001"
- C. 1500 DENIER KEVLAR
- D. 30 AWG 7X.004TC CONCENTRIC
OD .011±.001"
- E. ALUMINUM MYLAR SHIELD
- F. 20 MIL NOMINAL PRESSURED PVC JACKET 80°C
15 MIL MINIMUM PRESSURED PVC JACKET 300V
COLOR GRAY

CABLE IS NOT UL OR CSA RECOGNIZED

COLOR CODE

- 1. WHITE
- 2. BLUE
- 3. VIOLET
- 4. BLACK
- 5. GREEN

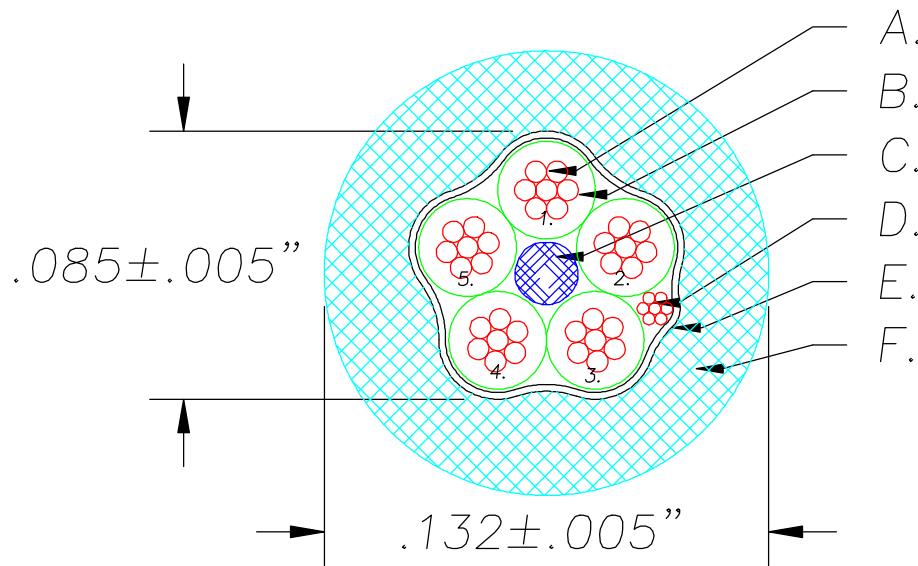

ELECTRICAL REQUIREMENTS:

NONE SPECIFIED

MECHANICAL REQUIREMENTS:

NONE SPECIFIED

CHANGED COLOR CODE	B	9/10/97	KJR	
CHANGED FROM POLY FILLER TO KEVLAR	A	9/10/97	KJR	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.