


34 PAIR 28 AWG SCSI-3 CABLE

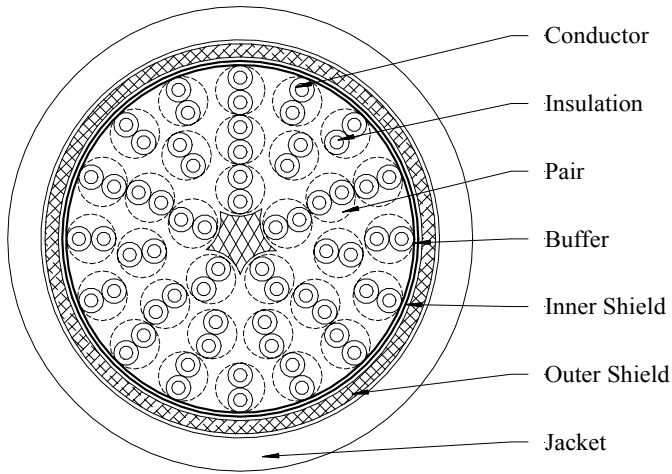

CONSTRUCTION

Pair Component

Conductor: 28 AWG 7/36 Tin Plated Copper, 0.015 Inch Diameter
Insulation: 0.010 Inches of Foam Polypropylene, 0.035 Inch Diameter
Pair: 2 Insulated Conductors Twisted Together

Final Assembly

Core: Fibrillated Polypropylene Filler
Layer 1: 5 Pairs (#1-5) Cabled Around Core
Layer 2: 11 Pairs (#6-16) Cabled Around Layer 1
Layer 3: 18 Pairs (#17-34) Cabled Around Layer 2
Buffer: Foam Polypropylene Tape, 25% Overlap
Inner Shield: Aluminum/Polyester Tape, Aluminum Side Facing Out, 25% Overlap
Outer Shield: 36 AWG Tin Plated Copper Braid, 85% Coverage
Jacket: 0.035 Inches of Flexible PVC, Color – Black
Diameter: 0.490 ± 0.015 Inches
Print Legend (White Ink): "MADISON CABLE (UL) TYPE CL2 75°C 28 AWG CSA AWM II A/B 80°C 150V FT1 SCSI-3 RoHS COMPLIANT {Date Code}"¹

¹ Date Code is a 4-digit code with the first two digits identifying the calendar week and the last two identifying the calendar year of manufacturing. Example – 0206 for cable manufactured in the second week of January 2006.

COLOR CODE

Pair #	Cond #1 – Cond #2	Pair #	Cond #1 – Cond #2
1	White/Tan-Tan/White	18	Brown/Pink-Pink/Brown
2	White/Brown-Brown-White	19	Brown/Orange-Orange/Brown
3	White/Pink-Pink/White	20	Brown/Yellow-Yellow/Brown
4	White/Orange-Orange/White	21	Brown/Green-Green/Brown
5	White/Yellow-Yellow/White	22	Brown/Blue-Blue/Brown
6	White/Green-Green/White	23	Brown/Violet-Violet/Brown
7	White/Blue-Blue/White	24	Brown/Gray-Gray/Brown

8	White/Violet-Violet/White	25	Pink/Orange-Orange/Pink
9	White/Gray-Gray/White	26	Pink/Yellow-Yellow/Pink
10	Tan/Brown-Brown/Tan	27	Pink/Green-Green/Pink
11	Tan/Pink-Pink/Tan	28	Pink/Blue-Blue/Pink
12	Tan/Orange-Orange/Tan	29	Pink/Violet-Violet/Pink
13	Tan/Yellow-Yellow/Tan	30	Pink/Gray-Gray/Pink
14	Tan/Green-Green/Tan	31	Orange/Yellow-Yellow/Orange
15	Tan/Blue-Blue/Tan	32	Orange/Green-Green/Orange
16	Tan/Violet-Violet/Tan	33	Orange/Blue-Blue/Orange
17	Tan/Gray-Gray/Tan	34	Orange/Violet-Violet/Orange

ELECTRICAL CHARACTERISTICS

Impedance:

Differential: 132 ± 10 Ohms @ TDR
Single-Ended: 85 ± 8 Ohms @ TDR

Capacitance:

Differential: 12.5 pF/ft Maximum
Single-Ended: 20 pF/ft Maximum

Time Delay:

1.44 ns/ft Nominal
Time Delay Skew: 0.050 ns/ft Maximum

Attenuation:

Differential: 0.016 dB/ft Nominal @ 5 MHz
Single-Ended: 0.022 dB/ft Nominal @ 5 MHz

Conductor DC Resistance: 0.070 Ohms/ft Maximum @ 20°C

SAFETY CERTIFICATION

UL Listing: Type CL2 as specified in Article 725 of the National Electrical Code
CSA Certification: AWM II A/B 80°C 150 Volts FT1
RoHS Compliance: In Accordance with European Directive 2002/95/EC, Issue 13.2.2003

 **Tyco Electronics** 
 125 Goddard Memorial Drive • Worcester, MA 01603 USA
 Tel: (508) 752-2884 Toll-Free: (877) MADISON Fax: (508) 752-4230

Spec Number: 101-9554

Part Number: 68KDKLF008

Customer:

Customer #:

REVISION HISTORY

Rev #	Date	Author	Description
1	02/05/10	HA	Initial Release

Prepared By: H. Abusamra

Reviewed By: T. Grzysiewicz

B. Morissette

Page

1 of 1

Users should evaluate the suitability of this product for their application. Contact factory for latest revision of specification. Tyco Electronics reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to the Buyer.