



3-Way Outlet Shapes, VG style


- Helashrink 300 Series

Features and Benefits


- Cable strain relief and mechanical protection at harness transition points
- All outlets clearly marked to aid orientation during installation



304-1-G supplied / fully recovered.

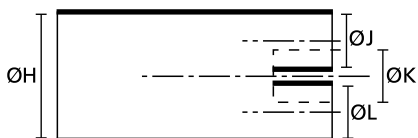

a: Expanded form (supplied)

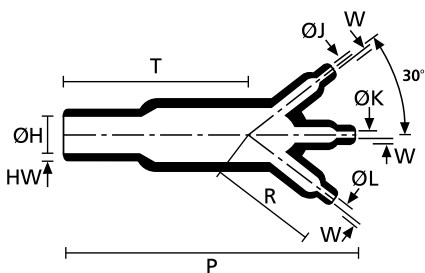

b: Fully recovered form (after heating)

For Material / Adhesive information please refer to page 200.

TYPE	ØH min. a	ØH max. b	ØJ/K/L min. a	ØJ/K/L max. b	P ± 10%	R ± 10%	HW ± 20%	W ± 20%	T ± 10%	Designation as per VG-Norm	Article-No.
306-1-G	13.0	6.5	6.5	3.5	46.0	25.4	1.3	1.0	20.3	VG95343T08D001A	403-06180
304-1-G	27.0	13.5	13.0	7.0	93.0	50.3	2.5	1.5	42.9	VG95343T08D002A	403-04180
310-1-G	38.5	19.0	19.0	10.0	135.0	73.7	3.1	1.8	61.0	VG95343T08D003A	403-10180
311-1-G	55.5	25.5	27.0	12.5	192.0	103.1	4.6	3.1	88.9	VG95343T08D004A	403-11180

All dimensions in mm. Subject to technical changes.

For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the moulded shapes catalogue.



Please note! Not all products listed on this page may have this approval. For product specific approvals please refer to the Appendix.