



### 3-Way Outlet Shapes, VG style


#### Helashrink 300 Series

#### Features and Benefits


- Cable strain relief and mechanical protection at harness transition points
- All outlets clearly marked to aid orientation during installation



304-1-G supplied / fully recovered.

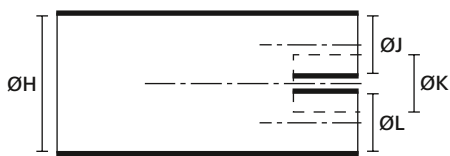

a: Expanded form (supplied)

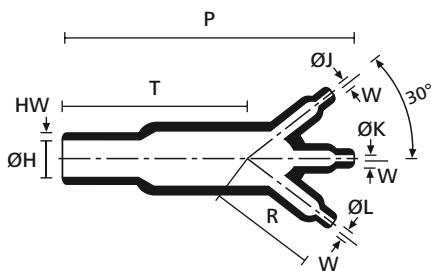

b: Fully recovered form (after heating)

TYPE	ØH min. a	ØH max. b	ØJ/K/L min. a	ØJ/K/L max. b	P ± 10%	R ± 10%	HW ± 30%	W ± 20%	T ± 10%	Designation as per VG-Norm	Article-No.
306-1-G	13.0	6.5	6.5	3.5	46.0	25.4	1.5	1.0	20.3	VG95343T08D001A	403-06180
304-1-G	27.0	13.5	13	7.0	93.0	50.3	2.5	1.5	42.9	VG95343T08D002A	403-04180
310-1-G	38.5	19.0	19	10.0	135.0	73.7	3.0	1.8	61.0	VG95343T08D003A	403-10180
311-1-G	55.5	25.5	27	12.5	192.0	103.1	4.5	3.1	88.9	VG95343T08D004A	403-11180

All dimensions in mm. Subject to technical changes.



For product specific approvals and specifications please refer to the Appendix.