


DATE	REV	ECN	DESCRIPTION
4/10/2007	B	16655	SPECIFICATION UPDATED

PRODUCT SPECIFICATION

Parent Number: F22086- DO NOT USE!!! CONSULT ENGINEERING.

Description: 22 7/30 2% Nickel Plated AWM 3122 SEWF-1
Braided Silicone

DIAMETER: 0.062
TOLERANCE ± : 0.002

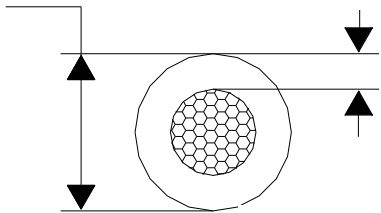

MIN AVG WALL: 0.015
MINIMUM WALL: 0.013

Stranding: 7/30 2% Nickel Plated Copper
Style: UL: AWM 3122 CSA: SEWF-1

Insulation: Braided Silicone

Print Legend: 22 AWG (.324mm²) E57498 (PLANT ID CODE) (AWM LOGO) AWM 3122 200C 300V -- 156205 CSA SEWF-1 200C 300V FT-1

Voltage: 300V

Temperature: 200C

- Notes:**
1. Diameter shown is OD under braid.
 2. The OD over the braid is approximately 0.073".

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Southwire's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Southwire or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Southwire's standard terms and conditions contained therein, including without limitation Southwire's standard warranty. Southwire disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without written consent of Southwire Company, LLC.

Customer Approval:
Customer Part Nbr(s): _____
Approved By: _____ **Date:** _____
Title: _____ **Company Name:** _____



Copperfield[®]
 1115 W. North Street
 Bremen, IN 46506
 Phone: 1-574-546-5115

