


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
2/19/2008	A	20014	SPECIFICATION CREATED

Parent Number: F20137-

Description: 20 10/30 2% Nickel Plated AWM 3135 AWM I
A/B Braidless Silicone

DIAMETER: 0.103
TOLERANCE ±: 0.003

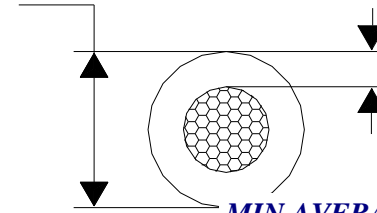

MIN AVERAGE WALL: 0.030

MINIMUM WALL: 0.027

Stranding: 10/30 2% Nickel Plated LHL

Style: UL: AWM 3135 CSA: AWM I A

Insulation: Silicone Rubber

Print Legend: 20 AWG (0.519mm²) E96824 (PLANT ID CODE) (AWM LOGO) AWM 3135 200C 600V --- 156016 CSA AWM I A 200C 600V FT2

Voltage: 600V

Temperature: 200C

Notes:

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

