


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
8/7/2009	C	20977	SPECIFICATION UPDATED

Parent Number: F08050-

Description: 8 7x19/29 TC AWM 3195 UL SIS CL 1251
AWM I A/B

DIAMETER: 0.261
TOLERANCE ± : 0.005

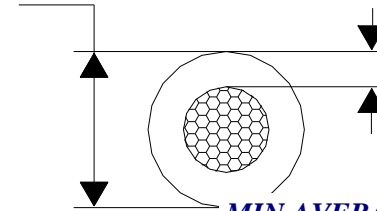

MIN AVERAGE WALL: 0.045

MINIMUM WALL: 0.040

Stranding: 7X19/29 TC Unilay

Style: UL: AWM 3195 UL SIS CSA: CL 1251 AWM I A/B

Insulation: XLPE

Print Legend: 8 AWG (8.367mm²) E137925 (PLANT ID CODE) (UL) SIS 600V AND AWM 3195 600V OR 3237 1000V -- 156016 CSA CL1251 125C 600V OR AWM I A/B 125C 600V FT2 -- MADE IN USA

Voltage: 600V

Temperature: SIS = 90C, AWM 3195 = 125C

Notes:

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

