


SAE AS22759/32

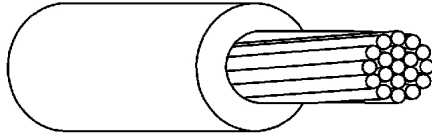


M22759/32 is a lightweight, high temperature airframe and avionics wire insulated with a single layer of cross-linked, modified ethylene-tetrafluoroethylene (ETFE) insulation. The dual insulation provides superior cut-through and abrasion resistance making it ideal for use in Mil-Spec and Aerospace applications.

Conductor: Tin Plated Copper
 Insulation: Cross-linked modified ETFE
 Temp. Rating: 150° C
 Voltage Rating: 600 Volts R.M.S.
 M27500 Type: SB

Mil-Spec Part	WireMasters Part	AWG	Stranding	Ohms/1000ft	Min	Max	(lbs/1000ft)
M22759/32-30-*	WM22759/32-30-*	30	7X38	108	0.022	0.026	0.66
M22759/32-28-*	WM22759/32-28-*	28	7X36	68.6	0.025	0.029	0.91
M22759/32-26-*	WM22759/32-26-*	26	19X38	41.3	0.030	0.034	1.40
M22759/32-24-*	WM22759/32-24-*	24	19X36	26.2	0.035	0.039	2.00
M22759/32-22-*	WM22759/32-22-*	22	19X34	16.2	0.041	0.045	2.80
M22759/32-20-*	WM22759/32-20-*	20	19X32	9.88	0.048	0.052	4.30
M22759/32-18-*	WM22759/32-18-*	18	19X30	6.23	0.058	0.062	6.50
M22759/32-16-*	WM22759/32-16-*	16	19X29	4.81	0.066	0.070	8.30
M22759/32-14-*	WM22759/32-14-*	14	19X27	3.06	0.082	0.088	13.0
M22759/32-12-*	WM22759/32-12-*	12	37X28	2.02	0.100	0.106	19.7

SAE AS22759/33

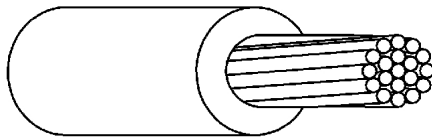

M22759/33 is a lightweight, high temperature airframe and avionics wire insulated with a single layer of cross-linked, modified ethylene-tetrafluoroethylene (ETFE) insulation. The dual insulation provides superior cut-through and abrasion resistance making it ideal for use in Mil-Spec and Aerospace applications.

Conductor: Silver Plated High Strength Copper Alloy
 Insulation: Cross-linked modified ETFE
 Temp. Rating: 200° C
 Voltage Rating: 600 Volts R.M.S.
 M27500 Type: SC

Mil-Spec Part	WireMasters Part	AWG	Stranding	Ohms/1000ft	Min	Max	(lbs/1000ft)
M22759/33-30-*	WM22759/33-30-*	30	7X38	117	0.022	0.026	0.66
M22759/33-28-*	WM22759/33-28-*	28	7X36	74.4	0.025	0.029	0.91
M22759/33-26-*	WM22759/33-26-*	26	19X38	44.8	0.030	0.034	1.40
M22759/33-24-*	WM22759/33-24-*	24	19X36	28.4	0.037	0.039	2.00
M22759/33-22-*	WM22759/33-22-*	22	19X34	17.5	0.041	0.045	2.90
M22759/33-20-*	WM22759/33-20-*	20	19X32	10.7	0.048	0.052	4.40