




DESC: 18/2 AWM 2586 105C 600V			DWG NO: FAWM182-088		ITEM	SPECS.
SCALE: 25x	DATE: 3/24/11	DR. BY: DPL	NWI P/N: SEE BELOW		A.	18 GAUGE 16x30BC BUNCHED
CUSTOMER: CATERPILLAR		CUSTOMER P/N: T.B.D.			B.	15 MILS PVC INSULATION PER UL AWM 10708 13 MILS MIN. PVC INSULATION O.D. .079±.002"

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

WI P/N: FAWM182-088
NM P/N: FAWM182-088N

C.	18 GAUGE 16x30TC DRAIN
D.	ALUMINUM FOIL SHIELD; FOIL IN 25% MIN. OVERLAP 100% COVERAGE
E.	30 MILS PRESSURED PVC JACKET 105C 600V 24 MILS MIN. PVC JACKET BLACK JACKET UL AND CSA RECOGNIZED

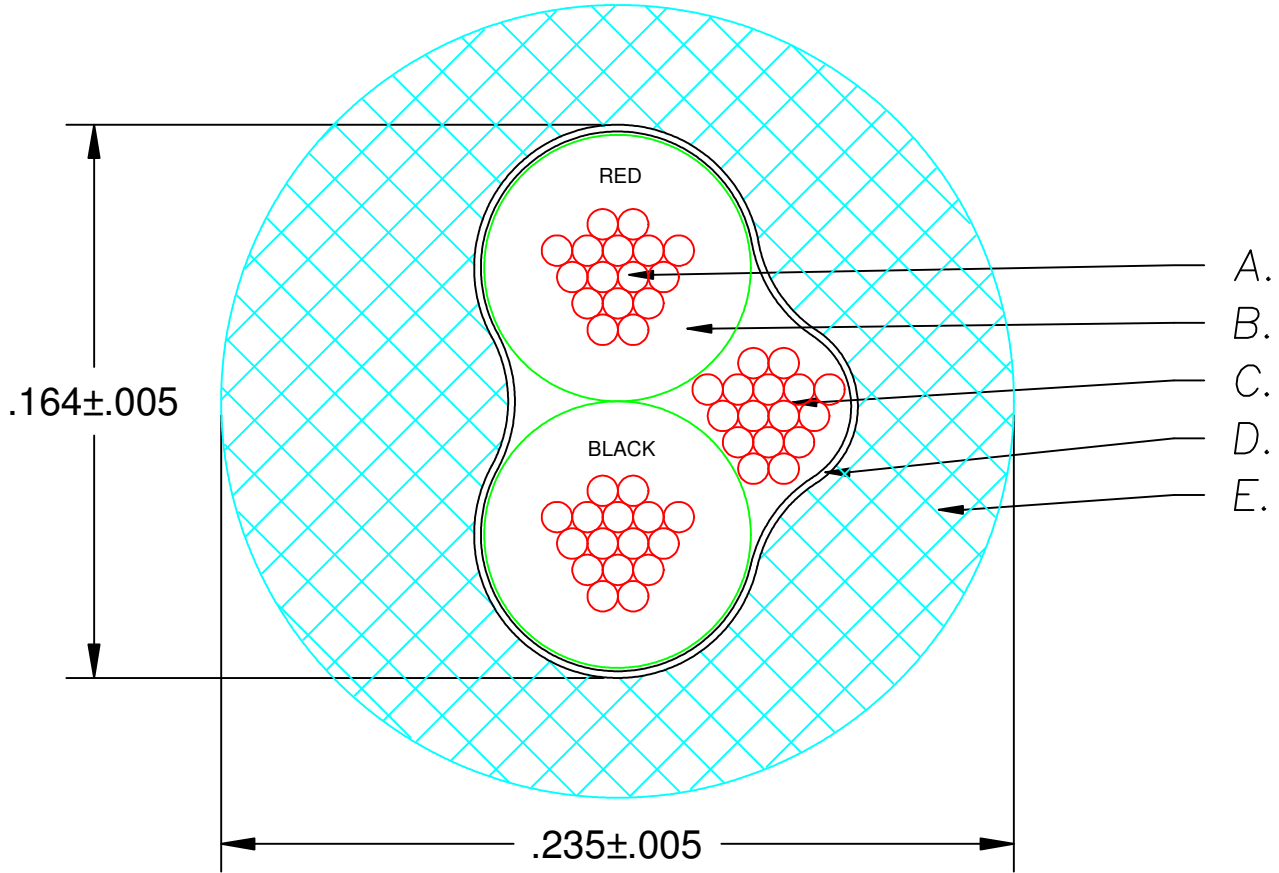

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

Removed EL requirements, test on 1st run only	D	11/20/12	LSB		
ADDED NM P/N	C	3/21/12	LSB		
ADDED CONDUCTOR COLORS	B	3/25/11	DPL		
INITIAL RELEASE	A	3/24/11	DPL		
REVISION RECORD	REV	REV DATE	APR 1	APR 2	QA R