


GeneralCable
THREE PAIR 22AWG
SHIELDED ULTRA CABLE

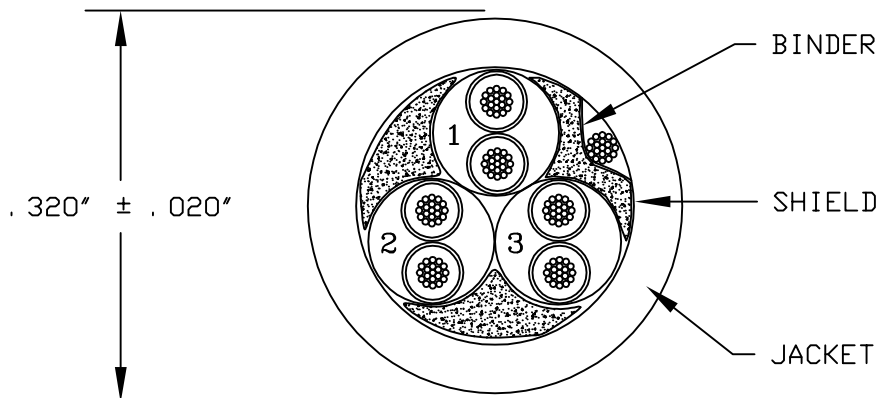

COMPONENT I - TWISTED PAIR #22AWG (TP 22)
 (ITEMS 1-3) CONDUCTOR: 22AWG 19/34 TINNED COPPER
 INSULATION: POLYRAD ULTRA-.010" NOMINAL WALL
 SHEATH: CROSS-LINKED FLUOROPOLYMER-.005" NOMINAL WALL
 DIAMETER: .060" NOMINAL
 TWISTED PAIR
 TWO (2) OF THE ABOVE PRIMARIES TWISTED
 TOGETHER WITH A L. H. LAY

CABLE - CORE: THREE (3) COMPONENT I (ITEMS 1-3) + FILLERS
 CABLED TOGETHER WITH A L. H. LAY

BINDER - .001" MYLAR TAPE-25% MINIMUM OVERLAP

DRAIN WIRE - 22AWG 19/34 TINNED COPPER

SHIELD - .0015" ALUMINUM/MYLAR TAPE-25% MINIMUM OVERLAP
 ALUMINUM SIDE IN AGAINST DRAIN WIRE

JACKET - POLYRAD XT-ROHS (GRAY)-.045" NOMINAL WALL

DIAMETER - .320" NOMINAL

RATINGS - 125°C 600V

MIN BEND RADIUS - STATIC: 1.5"
 DYNAMIC: 3.8"

JACKET PRINT - "GENERAL CABLE (WC) POLYRAD ULTRA ROHS
 3/PR 22AWG SHIELDED 125C 600V YEAR/MONTH"

COLOR CODE	ITEM NUMBER	COLOR
	1	WHITE BLACK
	2	WHITE BROWN
	3	WHITE RED

COMPLIANCES- NFPA 130

REVISIONS	O	03/28/13	FIRST ISSUE	GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u>	
	A	05/21/13	ADD MIN BEND RADIUS		
	B	11/13/13	ADD GCC PART NUMBER		
	C	6/6/16	ADD COMPLINCES & PRINT		
				DRAWING NO: 11-2000	
REFERENCES	WABTEC PN 10248P MODIFIED			DRAWN BY: T. IRID	APPROVED BY: ED. ABERBACH
	GeneralCable P/N 426860			THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	