


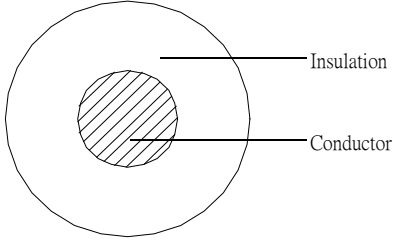

Product Specification

Part No.:	Color																					
	Available colors from: Black / Brown / Red / Orange / Yellow / Green / Blue / Violet Gray / White / Light Blue / Pink / Light Green / Light Gray																					
Cross Section	Performance																					
 <p style="margin-left: 100px;">Insulation</p> <p style="margin-left: 100px;">Conductor</p>	<table border="0"> <tr> <td colspan="2">Electrical Characteristics(20°C)</td> </tr> <tr> <td>Max. Conductor DC Resistance at 20°C (ohms/km)</td> <td style="text-align: right;">8.96</td> </tr> </table>	Electrical Characteristics(20°C)		Max. Conductor DC Resistance at 20°C (ohms/km)	8.96																	
Electrical Characteristics(20°C)																						
Max. Conductor DC Resistance at 20°C (ohms/km)	8.96																					
Marking																						
68A9377P14 14AWG 41 STRANDED BELDEN E357312-S 14AWG  AWM STYLE 3266 125C 300V VW-1 --- c  AWM I A 125C 300V FT1 ROHS CE																						
Description																						
Rating Voltage (V) 300 Rating Temperature (°C) -40~125 Certification UL Flame test FT1																						
Application																						
For internal wiring of appliances																						
Reference Standard																						
UL758, UL1581 & CSA C22.2 No.210.2																						
Construction																						
<table border="0"> <tr> <td>1Core</td> <td></td> </tr> <tr> <td>Conductor</td> <td style="text-align: right;">Stranded Tinned Copper</td> </tr> <tr> <td>AWG</td> <td style="text-align: right;">14</td> </tr> <tr> <td>Construction</td> <td style="text-align: right;">41/0.254</td> </tr> <tr> <td>Stranded Dia. (mm)</td> <td style="text-align: right;">1.87</td> </tr> <tr> <td>Insulation</td> <td style="text-align: right;">XL-PE</td> </tr> <tr> <td>Min.. Thickness (mm)</td> <td style="text-align: right;">0.33</td> </tr> <tr> <td>Nom. Thickness (mm)</td> <td style="text-align: right;">0.42</td> </tr> <tr> <td>Insulation Dia. (+/-0.10mm)</td> <td style="text-align: right;">2.70</td> </tr> </table>	1Core		Conductor	Stranded Tinned Copper	AWG	14	Construction	41/0.254	Stranded Dia. (mm)	1.87	Insulation	XL-PE	Min.. Thickness (mm)	0.33	Nom. Thickness (mm)	0.42	Insulation Dia. (+/-0.10mm)	2.70				
1Core																						
Conductor	Stranded Tinned Copper																					
AWG	14																					
Construction	41/0.254																					
Stranded Dia. (mm)	1.87																					
Insulation	XL-PE																					
Min.. Thickness (mm)	0.33																					
Nom. Thickness (mm)	0.42																					
Insulation Dia. (+/-0.10mm)	2.70																					
Mechanical Characteristics:																						
<table border="0"> <tr> <td colspan="2">Test Object</td> <td style="text-align: right;">Insulation</td> </tr> <tr> <td>Test Material</td> <td></td> <td style="text-align: right;">XL-PE</td> </tr> <tr> <td>Before Tensile Strength (Mpa)</td> <td></td> <td style="text-align: right;">>=13.8</td> </tr> <tr> <td>Aging Elongation (%)</td> <td></td> <td style="text-align: right;">>=300</td> </tr> <tr> <td>Aging Condition</td> <td></td> <td style="text-align: right;">158±2°C x 168 hrs</td> </tr> <tr> <td>After Tensile Strength (Mpa)</td> <td></td> <td style="text-align: right;">>=80% of original</td> </tr> <tr> <td>Aging Elongation (%)</td> <td></td> <td style="text-align: right;">>=80% of original</td> </tr> </table>	Test Object		Insulation	Test Material		XL-PE	Before Tensile Strength (Mpa)		>=13.8	Aging Elongation (%)		>=300	Aging Condition		158±2°C x 168 hrs	After Tensile Strength (Mpa)		>=80% of original	Aging Elongation (%)		>=80% of original	
Test Object		Insulation																				
Test Material		XL-PE																				
Before Tensile Strength (Mpa)		>=13.8																				
Aging Elongation (%)		>=300																				
Aging Condition		158±2°C x 168 hrs																				
After Tensile Strength (Mpa)		>=80% of original																				
Aging Elongation (%)		>=80% of original																				
Sample Record																						
<table border="0"> <tr> <td>Sample No. :</td> <td></td> <td>Rev.: 2</td> </tr> <tr> <td>Original spec no. SZ-B3266-313</td> <td></td> <td>Rev.:</td> </tr> <tr> <td>Ref. spec No. :</td> <td></td> <td></td> </tr> </table>	Sample No. :		Rev.: 2	Original spec no. SZ-B3266-313		Rev.:	Ref. spec No. :															
Sample No. :		Rev.: 2																				
Original spec no. SZ-B3266-313		Rev.:																				
Ref. spec No. :																						
Revision History																						
Prepared by: YANGHUA 2015/3/16	Table No.:T100	Rev.: 0																				
Approved by: CICIPHENG 2015/3/16		Page 1 of 1																				