


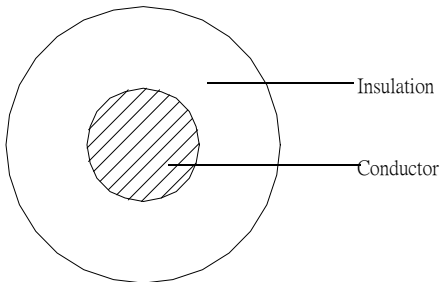

Product Specification

Part No.:	Color																					
	Insulation Per request																					
Cross Section																						
																						
Marking																						
68A9378P4 4AWG 420 STRANDED BELDEN E357312-S 4AWG  AWM STYLE 3271 125C 600V VW-1 --- c  AWM I A 125C 600V FT1 ROHS CE																						
Description																						
Rating Voltage (V) 600 Rating Temperature (°C) -40~125 Certification UL Flame test FT1&VW-1																						
Application																						
For use as motor leads or internal wiring of appliances																						
Reference Standard																						
UL758, UL1581 & CSA C22.2 No.210.2																						
Construction																						
1Core Conductor Stranded Tinned Copper AWG 4 Construction 7/60/0.254 Stranded Dia. (mm) 6.70 Insulation XL-PE Min. Thickness (mm) 1.01 Nom. Thickness (mm) 1.30 Insulation Dia. (±0.3mm) 9.60																						
	Performance																					
	Electrical Characteristics(20°C) Max. Conductor DC Resistance at 20°C (ohms/km) 0.882																					
	Mechanical Characteristics:																					
	<table border="0"> <tr> <td>Test Object</td> <td></td> <td style="text-align: right;">Insulation</td> </tr> <tr> <td>Test Material</td> <td></td> <td style="text-align: right;">XL-PE</td> </tr> <tr> <td>Before Tensile Strength (Mpa)</td> <td></td> <td style="text-align: right;">>=13.8</td> </tr> <tr> <td>Aging Elongation (%)</td> <td></td> <td style="text-align: right;">>=300</td> </tr> <tr> <td>Aging Condition</td> <td></td> <td style="text-align: right;">158±2°C x 168 hrs</td> </tr> <tr> <td>After Tensile Strength (Mpa)</td> <td></td> <td style="text-align: right;">>=80% of original</td> </tr> <tr> <td>Aging Elongation (%)</td> <td></td> <td style="text-align: right;">>=80% of original</td> </tr> </table>	Test Object		Insulation	Test Material		XL-PE	Before Tensile Strength (Mpa)		>=13.8	Aging Elongation (%)		>=300	Aging Condition		158±2°C x 168 hrs	After Tensile Strength (Mpa)		>=80% of original	Aging Elongation (%)		>=80% of original
Test Object		Insulation																				
Test Material		XL-PE																				
Before Tensile Strength (Mpa)		>=13.8																				
Aging Elongation (%)		>=300																				
Aging Condition		158±2°C x 168 hrs																				
After Tensile Strength (Mpa)		>=80% of original																				
Aging Elongation (%)		>=80% of original																				
	Sample Record																					
	<table border="0"> <tr> <td>Sample No. :</td> <td></td> <td>Rev.: 1</td> </tr> <tr> <td>Original spec no. SZ-B3271-355</td> <td></td> <td>Rev.:</td> </tr> <tr> <td>Ref. spec No. :</td> <td></td> <td></td> </tr> </table>	Sample No. :		Rev.: 1	Original spec no. SZ-B3271-355		Rev.:	Ref. spec No. :														
Sample No. :		Rev.: 1																				
Original spec no. SZ-B3271-355		Rev.:																				
Ref. spec No. :																						
	Revision History																					
	<table border="0"> <tr> <td>Prepared by: Yanghua</td> <td>2015/3/16</td> <td>Table No.:T100</td> <td>Rev.: 0</td> </tr> <tr> <td>Approved by: CICICHENG</td> <td>2015/3/16</td> <td></td> <td>Page 1 of 1</td> </tr> </table>	Prepared by: Yanghua	2015/3/16	Table No.:T100	Rev.: 0	Approved by: CICICHENG	2015/3/16		Page 1 of 1													
Prepared by: Yanghua	2015/3/16	Table No.:T100	Rev.: 0																			
Approved by: CICICHENG	2015/3/16		Page 1 of 1																			