


Part No.:BD-3058

15CX0.25mm²

Cross Section

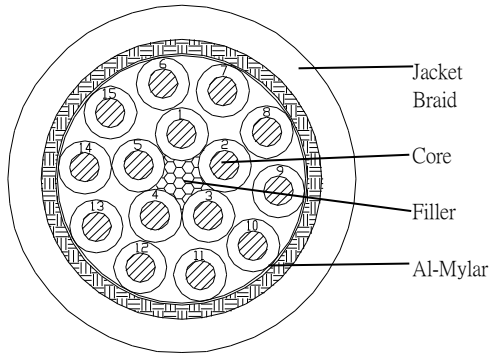

Marking

Non

Description

Rated Temperature (°C)		105
	Static	-40~105
Rated Voltage(V)		250V

Application

For general purpose power supply cord

Construction

15Cores	
Conductor	Stranded Bare copper
Cross Section(mm ²)	0.25
Construction (mm)	14/0.15
Stranded Dia. (mm)	0.64
Insulation	PVC
Min. Thickness (mm)	0.26
Nom. Thickness (mm)	0.33
Insulation Dia. (±0.08mm)	1.40
Assembly	15C+Filler
Direction	S
Al-Mylar tape(Overlapping,%)	>=25
Braid Shield	Tinned Copper
Coverage(%)	>=80
Jacket	PVC
Min. Thickness (mm)	0.61
Nom. Thickness (mm)	0.76
Dia. (±0.25mm)	8.20

Color

Insulation:

- 1.blue 2.white/yellow 3.green 4.gray/pink 5.red/blue 6.white/green
- 7.red 8.pink 9.yellow 10.black 11.gray 12.white 13.brown/green
- 14.brown 15.purple

Jacket:

Per request

Performance

Electrical Characteristics:

Max. Conductor DC Resistance at 20°C (ohms/km)	89.3
--	------

Sample Record

Sample No. :	
Original spec no.:	Rev.:
Ref. spec No. : SK-BD-3058	Rev.0

Revision History

Prepared by:	DIFU	2012/11/14	Table No.:T100	Rev.: 0
Approved by:	CICICHENG	2012/11/14		Page 1 of 1

© 2016 Belden, Inc
 All Rights Reserved.
 Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.
 Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein. All sales of Belden products are subject to Belden's standard terms and conditions of sale.