


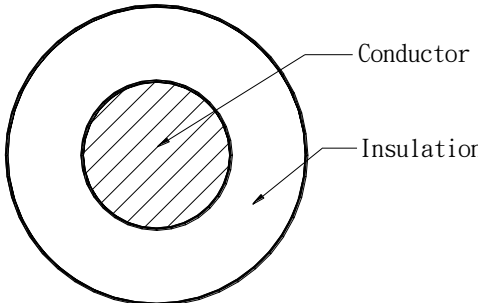

Product Specification

Part No.: B1569-641		Color																														
<p align="center">Cross Section</p>  <p>Conductor Insulation</p>		<p>Insulation Black / Brown / Red / Orange / Yellow / Green / Blue / Violet Gray / White / Light Blue / Pink / Light Green / Light Gray</p>																														
		<p align="center">Performance</p> <p>Electrical Characteristics:</p> <table border="0"> <tr> <td>Max. Conductor DC Resistance at 20°C (Ω /km)</td> <td align="right">36.7</td> </tr> </table>		Max. Conductor DC Resistance at 20°C (Ω /km)	36.7																											
Max. Conductor DC Resistance at 20°C (Ω /km)	36.7																															
<p align="center">Marking</p> <p>BELDEN E357312-S 20AWG  AWM STYLE 1569 105C 300V VW-1 - - -  AWM I A/B 105C 300V FT1 -F- ROHS</p>		<p align="center">Performance</p> <p>Electrical Characteristics:</p> <table border="0"> <tr> <td>Max. Conductor DC Resistance at 20°C (Ω /km)</td> <td align="right">36.7</td> </tr> </table>		Max. Conductor DC Resistance at 20°C (Ω /km)	36.7																											
Max. Conductor DC Resistance at 20°C (Ω /km)	36.7																															
<p align="center">Description</p> <table border="0"> <tr> <td>Rated Voltage (V)</td> <td align="right">300</td> </tr> <tr> <td>Rated Temperature (°C)</td> <td align="right">105</td> </tr> <tr> <td>Product Standard Certification</td> <td align="right">UL</td> </tr> <tr> <td>Flammability Test</td> <td align="right">VW-1, CSA FT1</td> </tr> </table> <p>Application For general purpose internal wiring of electronic and electrical equipment and power adaptor for portable PC.</p> <p>Reference Standard UL758, UL1581 & CSA C22.2 No. 210</p>		Rated Voltage (V)	300	Rated Temperature (°C)	105	Product Standard Certification	UL	Flammability Test	VW-1, CSA FT1	<p align="center">Mechanical Characteristics:</p> <table border="0"> <tr> <td>Test Object</td> <td></td> <td align="center">Insulation</td> </tr> <tr> <td>Test Material</td> <td></td> <td align="center">PVC</td> </tr> <tr> <td>Before Tensile Strength (Mpa)</td> <td></td> <td align="center">≥ 10.35</td> </tr> <tr> <td>Aging Elongation (%)</td> <td></td> <td align="center">≥ 100</td> </tr> <tr> <td>Aging Condition</td> <td></td> <td align="center">136±2°C x 168 hrs</td> </tr> <tr> <td>After Tensile Strength (Mpa)</td> <td></td> <td align="center">$\geq 70\%$ of original</td> </tr> <tr> <td>Aging Elongation (%)</td> <td></td> <td align="center">$\geq 65\%$ of original</td> </tr> </table>		Test Object		Insulation	Test Material		PVC	Before Tensile Strength (Mpa)		≥ 10.35	Aging Elongation (%)		≥ 100	Aging Condition		136±2°C x 168 hrs	After Tensile Strength (Mpa)		$\geq 70\%$ of original	Aging Elongation (%)		$\geq 65\%$ of original
Rated Voltage (V)	300																															
Rated Temperature (°C)	105																															
Product Standard Certification	UL																															
Flammability Test	VW-1, CSA FT1																															
Test Object		Insulation																														
Test Material		PVC																														
Before Tensile Strength (Mpa)		≥ 10.35																														
Aging Elongation (%)		≥ 100																														
Aging Condition		136±2°C x 168 hrs																														
After Tensile Strength (Mpa)		$\geq 70\%$ of original																														
Aging Elongation (%)		$\geq 65\%$ of original																														
<p align="center">Construction</p> <table border="0"> <tr> <td>1Core</td> <td></td> </tr> <tr> <td>Conductor</td> <td align="center">Stranded Tinned Copper</td> </tr> <tr> <td>AWG</td> <td align="right">20</td> </tr> <tr> <td>Construction</td> <td align="right">7/0.32</td> </tr> <tr> <td>Stranded Dia. (mm)</td> <td align="right">0.96</td> </tr> <tr> <td>Insulation</td> <td align="center">PVC</td> </tr> <tr> <td>Min.. Thickness (mm)</td> <td align="right">0.33</td> </tr> <tr> <td>Nom. Thickness (mm)</td> <td align="right">0.40</td> </tr> <tr> <td>Insulation Dia. (± 0.08mm)</td> <td align="right">1.76</td> </tr> </table>		1Core		Conductor	Stranded Tinned Copper	AWG	20	Construction	7/0.32	Stranded Dia. (mm)	0.96	Insulation	PVC	Min.. Thickness (mm)	0.33	Nom. Thickness (mm)	0.40	Insulation Dia. (± 0.08 mm)	1.76	<p align="center">Sample Record</p> <table border="0"> <tr> <td>Sample No. :</td> <td></td> </tr> <tr> <td>Original spec no.:</td> <td align="right">Rev.:</td> </tr> <tr> <td>Ref. spec No. : SK-B1569-641</td> <td align="right">Rev.: 0</td> </tr> </table>		Sample No. :		Original spec no.:	Rev.:	Ref. spec No. : SK-B1569-641	Rev.: 0					
1Core																																
Conductor	Stranded Tinned Copper																															
AWG	20																															
Construction	7/0.32																															
Stranded Dia. (mm)	0.96																															
Insulation	PVC																															
Min.. Thickness (mm)	0.33																															
Nom. Thickness (mm)	0.40																															
Insulation Dia. (± 0.08 mm)	1.76																															
Sample No. :																																
Original spec no.:	Rev.:																															
Ref. spec No. : SK-B1569-641	Rev.: 0																															
<p align="center">Revision History</p>		<p align="center">Revision History</p>																														
<p>Prepared by: Yaqin Mo 2012/11/13 Table No.:T100 Rev.: 0</p> <p>Approved by: CICICHENG 2012/11/13 Page 1 of 1</p>		<p>Prepared by: Yaqin Mo 2012/11/13 Table No.:T100 Rev.: 0</p> <p>Approved by: CICICHENG 2012/11/13 Page 1 of 1</p>																														