All rights reserved. Passing on and copying of thisdocument, use and communication of its contents not permitted without written authorization of LEMO
未经LEMO许可，不得擅自复制或发布

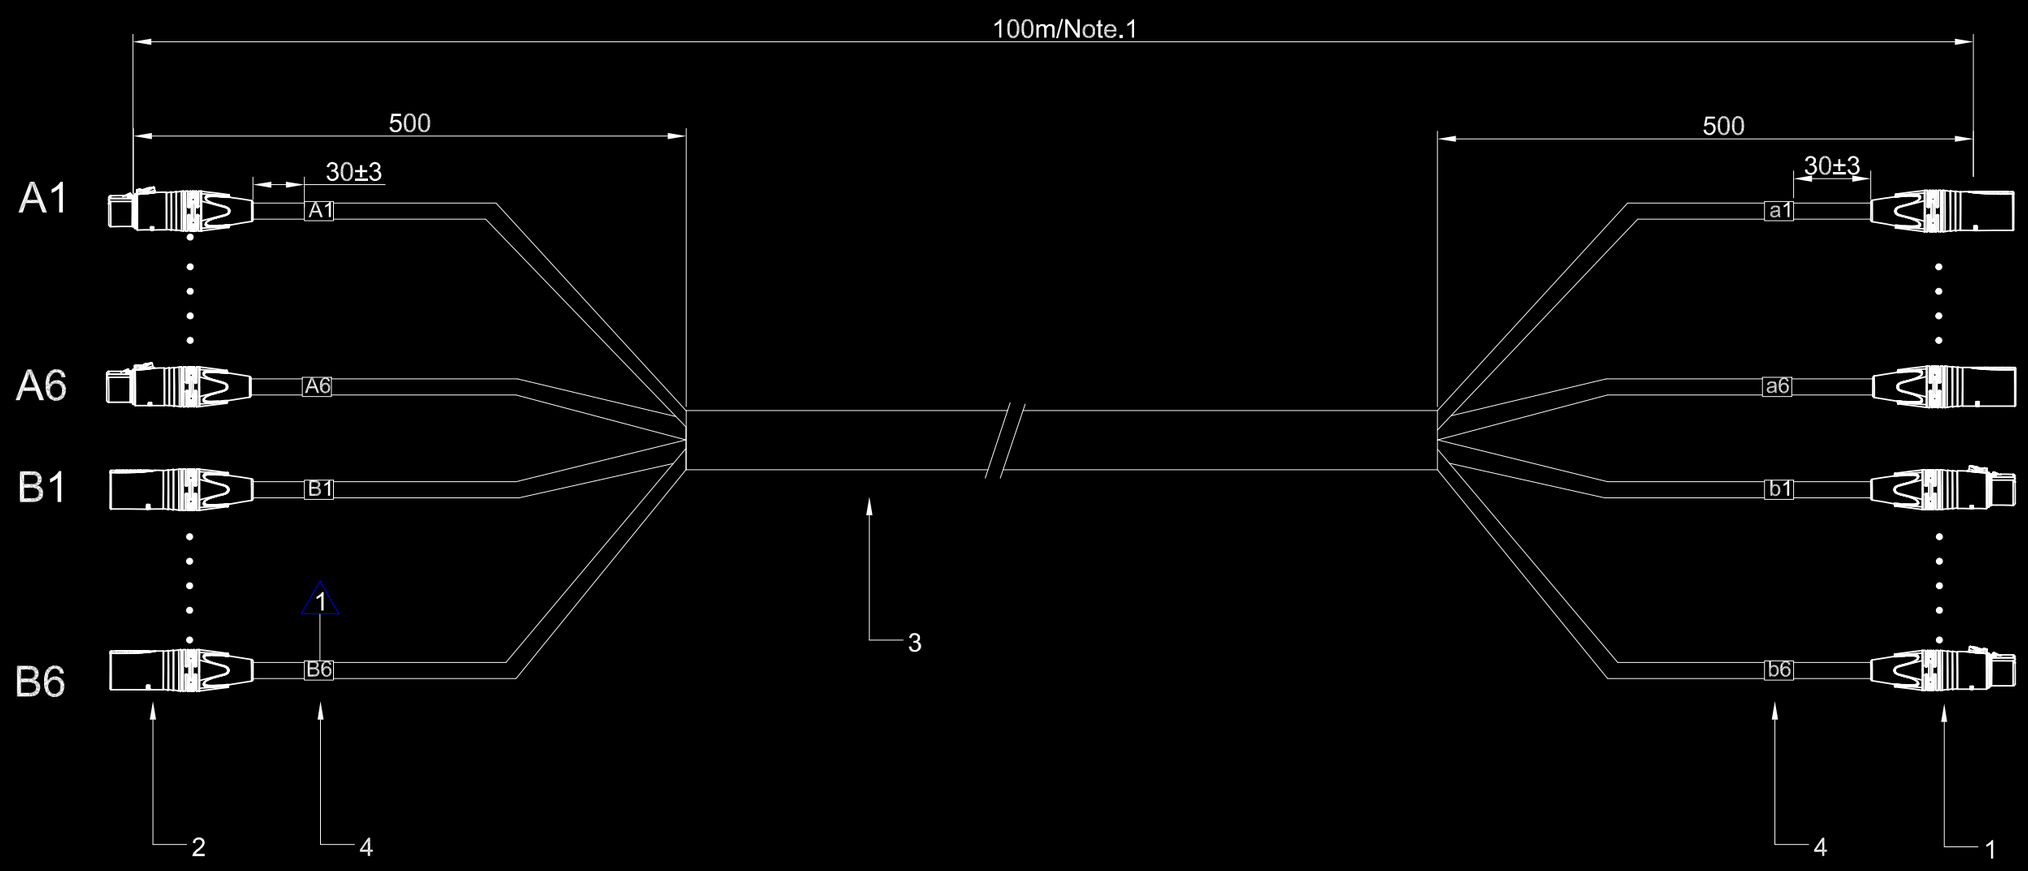

Contact numbering / 芯针排列
From solder side / 从焊接端看

A&b:

B&a:

Requirement/技术要求:

① LEMO标准线缆组件测试

1 标签：内容与两侧的编号一致

Note/注

1. Unless otherwise spepecified Dimensions are in "mm"
除特殊标注外, 长度单位:mm

Undefined Tolerance
未注长度公差
±20mm up to 0.95m
0.95m以内 ±20mm
±2% from 1.0m
超过1m ±2%

Item	Part No.	Qty	Description
4	LD.LABEL.0002	24'	标签
3	KC.CABLE.0001	100m	客供Belden1818R电缆
2	KB.CNTFC.0001	12'	客供卡侬头 母头
1		12'	客供卡侬头 公头

TITLE: 线缆组件	SCALE: ——	Draw. Astro	5.Jan.2016
		Appr. Leo	
		Rev. 1.0	5.Jan.2016
Cus. DWG: ——		HD-装配	
LEMO Electronics (Shanghai) Co., Ltd. Tel: (+86 21) 58997721 www.lemo-china.com	SHEET 1/2	DWG NO. LM.SA789.A	

Connection Designation / 接线表

卡侬头A1（公头）	棕色		卡侬头a1（母头）
1	地线	1	
2	红	2	
3	黑	3	

卡侬头A2（公头）	红色		卡侬头a2（母头）
1	地线	1	
2	红	2	
3	黑	3	

卡侬头A3（公头）	橙色		卡侬头a3（母头）
1	地线	1	
2	红	2	
3	黑	3	

卡侬头A4（公头）	黄色		卡侬头a4（母头）
1	地线	1	
2	红	2	
3	黑	3	

卡侬头A5（公头）	绿色		卡侬头a5（母头）
1	地线	1	
2	红	2	
3	黑	3	

卡侬头A6（公头）	蓝色		卡侬头a6（母头）
1	地线	1	
2	红	2	
3	黑	3	

卡侬头B1（母头）	紫色		卡侬头b1（公头）
1	地线	1	
2	红	2	
3	黑	3	

卡侬头B2（母头）	灰色		卡侬头b2（公头）
1	地线	1	
2	红	2	
3	黑	3	

卡侬头B3（母头）	白色		卡侬头b3（公头）
1	地线	1	
2	红	2	
3	黑	3	

卡侬头B4（母头）	黑色		卡侬头b4（公头）
1	地线	1	
2	红	2	
3	黑	3	

卡侬头B5（母头）	褐色		卡侬头b5（公头）
1	地线	1	
2	红	2	
3	黑	3	

卡侬头B6（母头）	粉色		卡侬头b6（公头）
1	地线	1	
2	红	2	
3	黑	3	

Note/注

1. Unless otherwise spepecified Dimensions are in "mm"
除特殊标注外, 长度单位:mm

Undefined Tolerance
未注长度公差
±20mm up to 0.95m
0.95m以内 ±20mm
±2% from 1.0m
超过1m ±2%

TITLE: 线缆组件	SCALE: ——	Draw. Astro	5.Jan.2016
		Appr. Leo	
		Rev. 1.0	5.Jan.2016
Cus. DWG: ——		JL-接线图	
LEMO Electronics (Shanghai) Co., Ltd. Tel: (+86 21) 58997721 www.lemo-china.com	SHEET 2/2	DWG NO. LM.SA789.A	