


Revision No. 变更数	Revisions 变更事项	Changed 修改者	Date 日期	Approved 确认者	Date 日期
①	1.2±0.2 was 1.4±0.2 / 1.2±0.2修正为1.4±0.2 4.6±0.2 was 4.7±0.2 / 4.6±0.2修正为4.7±0.2 8.0±0.5 was 8.3±0.7 / 8.0±0.5修正为8.3±0.7 390.0±10.0 was 380.0±10.0 / 390.0±10.0修正为380.0±10.0 7.0±0.5 was 7.6±0.9 / 7.0±0.5修正为7.6±0.9	HuangSheng	06/Feb/2006		
②	UL E193818 was UL E244195 / UL E193818 修改为UL E244195	HuangSheng	17/Sep/2007		
③	Added T50L-HSW to list/表中增加T50L-HSW	Jack Hua	10/Dec./2010	吉本纪	13/Dec/2010

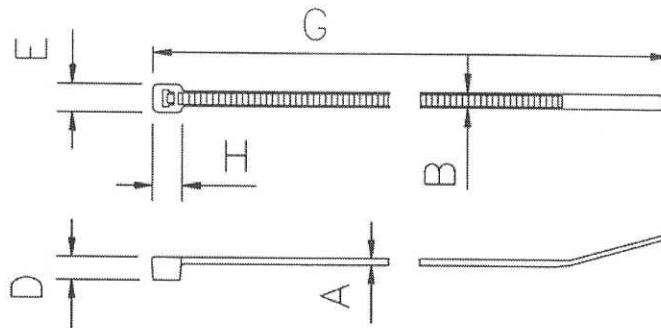

通用冲孔工具
Applicable Tool
MK9, MK9RE-F

UL 编号 E193818
UL File-No. ②

Standard Packing
标准包装
100根/袋, 40袋
(共4000根)/箱
100 Pcs/bag, 40 bags
(Total 4000Pcs)/box
200根/袋, 20袋
(共4000根)/箱
200 Pcs/bag, 20 bags
(Total 4000Pcs)/box

Min. Loop Tensile Strength
最小环形拉力
225N

Product code 型号	Material/材料:	Color/颜色	Continuous Operation Temperature/适用温度范围	Flame Rating 阻燃性	A	B	D	E	G	H
T50L	尼龙66 (聚酰胺66) 66 Nylon (Polyamid 66)	Milky White/乳白色	-40℃~+85℃	UL94V-2	1.2±0.2	4.6±0.2	5.8±0.3	8.0±0.5	390.0±10.0	7.0±0.5
T50L-B	尼龙66 (聚酰胺66) 66 Nylon (Polyamid 66)	Black/黑色	-40℃~+85℃							
T50L-W	尼龙66 (聚酰胺66) 耐烧型 66 Nylon (Polyamid 66)	Black/黑色	-40℃~+85℃							
T50L-HS	尼龙66 (聚酰胺66) 耐烧型 66 Nylon (Polyamid 66)	Light Green/浅绿色	-40℃~+105℃							
T50L-HSB	尼龙66 (聚酰胺66) 耐烧型 66 Nylon (Polyamid 66)	Black/黑色	-40℃~+105℃							
T50L-HR	尼龙46 (聚酰胺46) 耐烧型 46 Nylon (Polyamid 46)	Beige/米黄色	-40℃~+130℃							
T50L-HSW	尼龙66 (聚酰胺66) 耐烧型 66 Nylon (Polyamid 66)	Black/黑色	-40℃~+105℃	①	①		①	①	①	
T50L-VD	尼龙66 (聚酰胺66) 66 Nylon (Polyamid 66)	White/白色	-40℃~+85℃	UL94V-0						

Bundle Diameter
捆扎直径
1.5 to 110.0

Dimension/Units / 尺寸单位
mm

PERFORMANCE / 性能
SPECIFICATION / 标准



the copyright of this drawing is reserved by
HELLERMANN TYTON.
it is issued on condition that it is not
reproduced, copied or disclosed to a third
party, either wholly or in part, without the consent
of HELLERMANN TYTON.

Drawn/制图 HuangSheng 13/Jul/2005
Approved/审核 吉本纪 13/Dec/2010

HellermannTyton
海尔曼太通 (无锡) 电纜配件有限公司
(WUXI) Electrical Accessories Co., Ltd.
Tel: +86-510-85282538
Fax: +86-510-85280112

Scale/比例 NO/无

Title/品名

T50L Series

Drawing-No/图号 QDQ115-C1B-03

Format/格式 A4