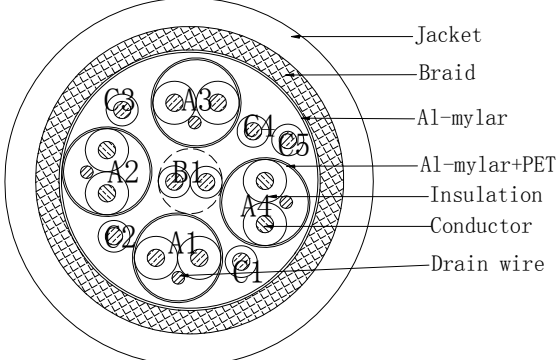




Part No.:		Color																																																																																													
Style 20276		<b>Insulation:</b> Pair A:1.brown*white 2.red*white 3.green*white 4.blue*white Pair B: yellow*orange Cores C:1.white 2.red 3.pink 4.gray 5.purple																																																																																													
<b>Cross Section</b> 		<b>Jacket :</b> According to the customer's requirements.																																																																																													
<b>Marking</b> BELDEN E357312-S SHIELDED  AWM STYLE 20276 80C 30V VW-1 --- c  AWM I/II A/B 80C 30V FT1 ROHS		<b>Performance</b> <b>Electrical Characteristics (20°C):</b> <table border="1"> <tr> <td>Max. Conductor DC Resistance at 20°C (Ω/km)</td> <td>A,B: 59.4 C: 94.2</td> </tr> <tr> <td>Dielectric Strength (kV/min ,AC)</td> <td>0.5</td> </tr> <tr> <td>Min. insulation resistance(MΩ*km)</td> <td>100</td> </tr> <tr> <td>Differential impedance at 20°C (Ω)(A)</td> <td>100+/-10(1~2.5ns)</td> </tr> <tr> <td>Intra skew(ps/7m)(Pairs A)</td> <td>Inter &lt;=112</td> </tr> <tr> <td>Inter skew(ns/7m)(Pairs A)</td> <td>Intra &lt;=1.78</td> </tr> <tr> <td>Far-end Crosstalk(dB/7m)(Pairs A)</td> <td>&lt;=-26</td> </tr> <tr> <td>Attenuation(dB/7m)(Pairs A)</td> <td>&lt;=5 (300KHz~825MHz ) &lt;5... &lt;=12 (825MHz~2.475GHz ) &lt;12...&lt;=20(2.475GHz~4.125Hz ) &lt;20... &lt;=25 (2.475GHz~4.125Hz )</td> </tr> </table>		Max. Conductor DC Resistance at 20°C (Ω/km)	A,B: 59.4 C: 94.2	Dielectric Strength (kV/min ,AC)	0.5	Min. insulation resistance(MΩ*km)	100	Differential impedance at 20°C (Ω)(A)	100+/-10(1~2.5ns)	Intra skew(ps/7m)(Pairs A)	Inter <=112	Inter skew(ns/7m)(Pairs A)	Intra <=1.78	Far-end Crosstalk(dB/7m)(Pairs A)	<=-26	Attenuation(dB/7m)(Pairs A)	<=5 (300KHz~825MHz ) <5... <=12 (825MHz~2.475GHz ) <12...<=20(2.475GHz~4.125Hz ) <20... <=25 (2.475GHz~4.125Hz )																																																																												
Max. Conductor DC Resistance at 20°C (Ω/km)	A,B: 59.4 C: 94.2																																																																																														
Dielectric Strength (kV/min ,AC)	0.5																																																																																														
Min. insulation resistance(MΩ*km)	100																																																																																														
Differential impedance at 20°C (Ω)(A)	100+/-10(1~2.5ns)																																																																																														
Intra skew(ps/7m)(Pairs A)	Inter <=112																																																																																														
Inter skew(ns/7m)(Pairs A)	Intra <=1.78																																																																																														
Far-end Crosstalk(dB/7m)(Pairs A)	<=-26																																																																																														
Attenuation(dB/7m)(Pairs A)	<=5 (300KHz~825MHz ) <5... <=12 (825MHz~2.475GHz ) <12...<=20(2.475GHz~4.125Hz ) <20... <=25 (2.475GHz~4.125Hz )																																																																																														
<b>Description</b> Rated Voltage (V) 30 Rated Temperature (°C) 80 Flammability Test VW-1 <b>Application</b> For Telecommunication equipment. <b>Reference Standard</b> UL758, UL1581 &Customer's require		<b>Mechanical Characteristics</b> <table border="1"> <tr> <td><b>Test Object</b></td> <td><b>Jacket</b></td> </tr> <tr> <td>Test Material</td> <td>PVC</td> </tr> <tr> <td>Before Tensile Strength (kg/mm<sup>2</sup>)</td> <td>&gt;=1.05</td> </tr> <tr> <td>Aging Elongation (%)</td> <td>&gt;=100</td> </tr> <tr> <td>Aging Condition</td> <td>113±2°C X 168 hrs</td> </tr> <tr> <td>After Tensile Strength</td> <td>&gt;=70% of original</td> </tr> <tr> <td>Aging Elongation</td> <td>&gt;=65% of original</td> </tr> </table>		<b>Test Object</b>	<b>Jacket</b>	Test Material	PVC	Before Tensile Strength (kg/mm <sup>2</sup> )	>=1.05	Aging Elongation (%)	>=100	Aging Condition	113±2°C X 168 hrs	After Tensile Strength	>=70% of original	Aging Elongation	>=65% of original																																																																														
<b>Test Object</b>	<b>Jacket</b>																																																																																														
Test Material	PVC																																																																																														
Before Tensile Strength (kg/mm <sup>2</sup> )	>=1.05																																																																																														
Aging Elongation (%)	>=100																																																																																														
Aging Condition	113±2°C X 168 hrs																																																																																														
After Tensile Strength	>=70% of original																																																																																														
Aging Elongation	>=65% of original																																																																																														
<b>Construction</b> <table border="1"> <thead> <tr> <th>Conductor</th> <th>Silver Plated Copper</th> <th colspan="2">Stranded Tinned Copper</th> </tr> </thead> <tbody> <tr> <td><b>15 Cores</b></td> <td><b>4PXA</b></td> <td><b>1PXB</b></td> <td><b>5CXC</b></td> </tr> <tr> <td>AWG</td> <td>22</td> <td>22</td> <td>24</td> </tr> <tr> <td>Construction (mm)</td> <td>7/0.254</td> <td>7/0.254</td> <td>7/0.200</td> </tr> <tr> <td>Stranded Dia. (mm)</td> <td>0.76</td> <td>0.76</td> <td>0.60</td> </tr> <tr> <td><b>Insulation</b></td> <td><b>FM-PE</b></td> <td><b>HD-PE</b></td> <td><b>HD-PE</b></td> </tr> <tr> <td>Min. Thickness (mm)</td> <td>0.40</td> <td>0.16</td> <td>0.18</td> </tr> <tr> <td>Nom. Thickness (mm)</td> <td>0.50</td> <td>0.20</td> <td>0.22</td> </tr> <tr> <td>Insulation Dia. (±0.06mm)</td> <td>1.95</td> <td>1.20</td> <td>1.10</td> </tr> <tr> <td><b>Drain wire</b></td> <td>Tinned Copper</td> <td>***</td> <td>***</td> </tr> <tr> <td>Construction (mm)</td> <td>7/0.254mm</td> <td><b>S</b></td> <td>***</td> </tr> <tr> <td><b>Pair Twist(Direction)</b></td> <td><b>S</b></td> <td><b>S</b></td> <td>***</td> </tr> <tr> <td><b>Al-mylar shield (Overlap,%)</b></td> <td>&gt;=25%</td> <td>***</td> <td>***</td> </tr> <tr> <td><b>PET Wrap (Overlap,%)</b></td> <td>&gt;=25%</td> <td>***</td> <td>***</td> </tr> <tr> <td><b>Assembly</b></td> <td></td> <td><b>A+B+C</b></td> <td></td> </tr> <tr> <td><b>Al-mylar shield (Overlap)</b></td> <td></td> <td><b>&gt;=25%</b></td> <td></td> </tr> <tr> <td><b>Braid Shield</b></td> <td></td> <td><b>Tinned Copper</b></td> <td></td> </tr> <tr> <td>Construction (mm)</td> <td></td> <td>0.1</td> <td></td> </tr> <tr> <td>Coverage</td> <td></td> <td>75%(Ref)</td> <td></td> </tr> <tr> <td><b>Jacket</b></td> <td></td> <td><b>PVC</b></td> <td></td> </tr> <tr> <td>Min. Thickness (mm)</td> <td></td> <td>0.60</td> <td></td> </tr> <tr> <td>Nom. Thickness (mm)</td> <td></td> <td>0.75</td> <td></td> </tr> <tr> <td>Dia. (±0.30mm)</td> <td></td> <td>12.00</td> <td></td> </tr> </tbody> </table>		Conductor	Silver Plated Copper	Stranded Tinned Copper		<b>15 Cores</b>	<b>4PXA</b>	<b>1PXB</b>	<b>5CXC</b>	AWG	22	22	24	Construction (mm)	7/0.254	7/0.254	7/0.200	Stranded Dia. (mm)	0.76	0.76	0.60	<b>Insulation</b>	<b>FM-PE</b>	<b>HD-PE</b>	<b>HD-PE</b>	Min. Thickness (mm)	0.40	0.16	0.18	Nom. Thickness (mm)	0.50	0.20	0.22	Insulation Dia. (±0.06mm)	1.95	1.20	1.10	<b>Drain wire</b>	Tinned Copper	***	***	Construction (mm)	7/0.254mm	<b>S</b>	***	<b>Pair Twist(Direction)</b>	<b>S</b>	<b>S</b>	***	<b>Al-mylar shield (Overlap,%)</b>	>=25%	***	***	<b>PET Wrap (Overlap,%)</b>	>=25%	***	***	<b>Assembly</b>		<b>A+B+C</b>		<b>Al-mylar shield (Overlap)</b>		<b>&gt;=25%</b>		<b>Braid Shield</b>		<b>Tinned Copper</b>		Construction (mm)		0.1		Coverage		75%(Ref)		<b>Jacket</b>		<b>PVC</b>		Min. Thickness (mm)		0.60		Nom. Thickness (mm)		0.75		Dia. (±0.30mm)		12.00		<b>Sample Record</b> Sample No. : Original spec no.:SZ-B20276-3260 Rev.: 0 Ref. spec No. : Rev.:	
Conductor	Silver Plated Copper	Stranded Tinned Copper																																																																																													
<b>15 Cores</b>	<b>4PXA</b>	<b>1PXB</b>	<b>5CXC</b>																																																																																												
AWG	22	22	24																																																																																												
Construction (mm)	7/0.254	7/0.254	7/0.200																																																																																												
Stranded Dia. (mm)	0.76	0.76	0.60																																																																																												
<b>Insulation</b>	<b>FM-PE</b>	<b>HD-PE</b>	<b>HD-PE</b>																																																																																												
Min. Thickness (mm)	0.40	0.16	0.18																																																																																												
Nom. Thickness (mm)	0.50	0.20	0.22																																																																																												
Insulation Dia. (±0.06mm)	1.95	1.20	1.10																																																																																												
<b>Drain wire</b>	Tinned Copper	***	***																																																																																												
Construction (mm)	7/0.254mm	<b>S</b>	***																																																																																												
<b>Pair Twist(Direction)</b>	<b>S</b>	<b>S</b>	***																																																																																												
<b>Al-mylar shield (Overlap,%)</b>	>=25%	***	***																																																																																												
<b>PET Wrap (Overlap,%)</b>	>=25%	***	***																																																																																												
<b>Assembly</b>		<b>A+B+C</b>																																																																																													
<b>Al-mylar shield (Overlap)</b>		<b>&gt;=25%</b>																																																																																													
<b>Braid Shield</b>		<b>Tinned Copper</b>																																																																																													
Construction (mm)		0.1																																																																																													
Coverage		75%(Ref)																																																																																													
<b>Jacket</b>		<b>PVC</b>																																																																																													
Min. Thickness (mm)		0.60																																																																																													
Nom. Thickness (mm)		0.75																																																																																													
Dia. (±0.30mm)		12.00																																																																																													
<b>Revision History</b>		Prepared by: ADISON 2015/6/16 Table No.:T100 Rev.: 0 Approved by: CICI.CHENG 2015/6/16 Page 1 of 1																																																																																													