

Customer Specification

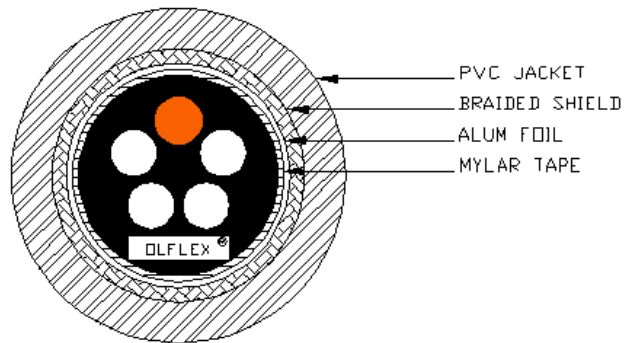
Lapp Spec # 892202TP - 892208TP

Date: 01/01/2011

Description

 Product Name: **Unitronic 22AWG Flex CY TP Series**
22AWG Multi-pair flexing shielded signal and control cable with color coded (Chart 3) PVC insulation, and a flame and oil resistant Gray PVC jacket, UL & CSA AWM, 300 Volts 90C. Conforms to EN 2002/95/EC (RoHS Directive). Bend radius for dynamic applications is 10 x diameter.

* All dimensions are nominal and inches unless specified, [] = mm *


TABLE 1

LAPP USA P/N	No. Pairs	Jacket Wall Nom.	Jacket Diameter Nom.
892202TP	2	.045	.304
892204TP	4	.045	.341
892206TP	6	.050	.419
892208TP	8	.050	.469