


IEWC # 32010309

20/11 TXL TRAILER CABLE 105C PVC JACKET

1/27/2016

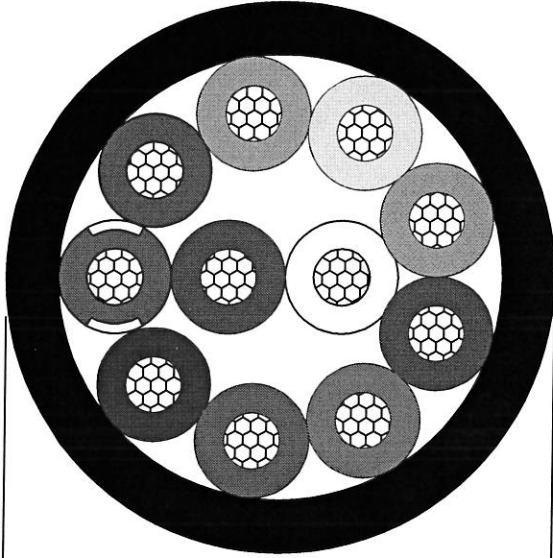

0.355±0.015

*Color pattern shown as finished good pays off reel.

NOTES:

1. Inners: 20/728 BC TXL per SAE J1128, $\phi = 0.070 \pm 0.003$ "
2. Color Pattern: Dk Red with Dual Parallel Extruded Stripes, Dk Brown, Gray, Yellow, Orange, Dk Blue, Tan, Dk Red, Purple, around Dk Green & White in Center
3. Filler: N/A
4. Separator: Polyester
5. Jacket: Black PVC, 105°C, Hardness 85-A, Nom. Wall Thickness = 0.030", Min Wall Thickness = 0.024", Tube Extruded, UV Resistant Jacket meets UL 720 hour Sunlight Resistance test. This claim is Southwire's and does not represent UL's opinion or imply approval.
6. Print: INNER CONDUCTORS ARE 125C XLPE AND OUTER JACKET IS 105C PVC - MEETS THE REQUIREMENTS OF THE UL 1581 UV/SUNLIGHT RESISTANCE TEST - EA# 11011 (REV#1) MADE IN USA
7. Note: Product will be convoluted.

Approved By: *Robert Hall* (Per Customer's Email) Date: 2-3-16

Revisions:

DATE	REV	ECN	CHANGE
1/18/2016	A	E33955	DRAWING CREATED
1/27/2016	B		Revised per customer request.



Copperfield®

1115 West North Street

Bremen, IN 46506

By: Rich Tremblay