


4 3 2 1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

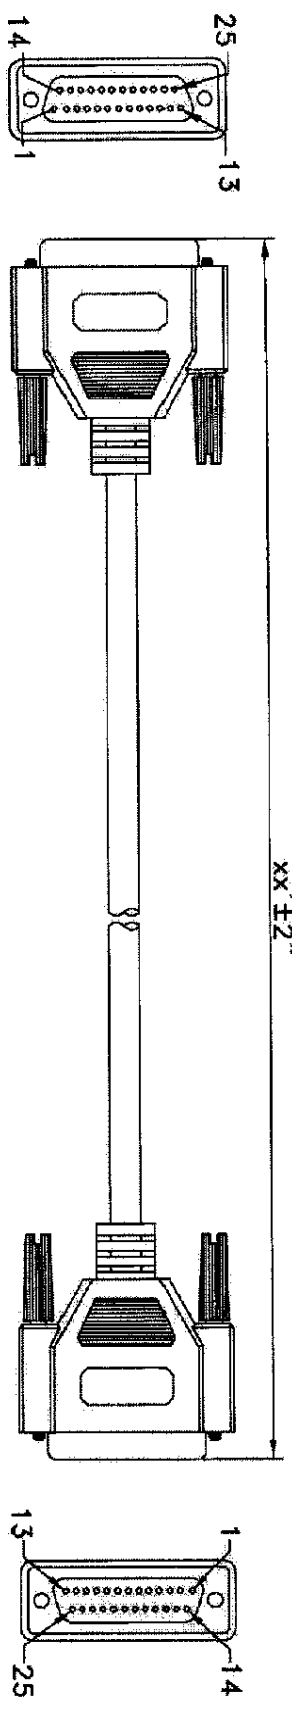

FRONT VIEW DB25 FEMALE DB25 FEMALE FRONT VIEW

***CONSTRUCTION:
 1.CABLE: * UL2464(25C/26#)+EA OD:8.9mm GRAY JACKET.

***CONNECTORS:
 2.DB25 PIN: * D-SUB 25PIN FEMALE SOLDERED TYPE.

- * PINS:BRASS WITH GOLD FLASH.
- * SHELL: STEEL WITH NICKEL PLATED.
- * INSULATOR: WHITE COLOR P.B.T UL 94V-0 RATED.
- * SCREW: THUMSCREW #4-40 UNC GRAY COLOR.
- * SHIELDED: 360° AL-FOIL SHIELDED.
- * MOLDED: GREY PVC 45P.
- * CT: 2 ohm IS: 5M ohm.
- 3.TEST: * ROUND CABLE IN CIRCLE FROM FASTENED BY CABLE TIE.
- 4.PACKING: * PACK EACH CABLE IN A POLY BAG AND HEAT SEALED.
- 5.MATERIAL: * MATERIAL WITH ROHS GRADE.

DB25F	DB25F	DB25F	DB25F
PIN OUT			
1	1	14	14
2	2	15	15
3	3	16	16
4	4	17	17
5	5	18	18
6	6	19	19
7	7	20	20
8	8	21	21
9	9	22	22
10	10	23	23
11	11	24	24
12	12	25	25
13	13	SHELL	SHELL

(XX) Denotes Cable Length:
 Available Lengths are 2, 6, 10', 25, 50' & 100'

BY	DATE	<p>PAN PACIFIC ENTERPRISES CO., INC</p>	PART NO	S-25FF-XX'
DRAWN				
CHK'D				
APPRV				
MATERIAL		UNITS		SHEET
FINISH		SCALE	NONE	1 of 1

050-15

050-15

A B C D

4 3 2 1