



# Heyco® RDD Lockit™ Strain Relief Bushings – Straight-Thru


Snap onto **Round Cables** for Faster Assembly into **Double D Mounting Holes** - *Semi-Automatic Equipment Available*  
Fit 1/2" Electrical Knock-out Hole



WILL FIT THESE CABLES UL Type	AWG/ Conductors	Approximate Size		MOUNTING HOLE Size		Thickness		RDD LOCKIT STRAIN RELIEF for Faster Assembly			Corresponding Mounting Hole Plug	
		in.	mm.	in.	mm.	in.	mm.	PART NO. Black	PART NO. White	DESC.	PART NO.	DESC.
See table on page 4-10	various	.290- .385	7,4- 9,8	.875 w/ .770 flats	22,2 w/ 19,6 flats	.032	0,8	<b>1857</b>	<b>1858</b>	RDD 201	2509	DD 875-770
						.063	1,6					
						.099	2,5					
						.126	3,2					
						.157	4,0					
Same as RDD 201 above except →						.078	2,0	<b>1855</b>	<b>1856</b>	RDD 201-2*	2509	DD 875-770
See table on page 4-10	various	.340- .430	8,6- 10,9	.875 w/ .770 flats	22,2 w/ 19,6 flats	.032	0,8	<b>1861</b>	<b>1862</b>	RDD 301	2509	DD 875-770
						.063	1,6					
						.099	2,5					
						.126	3,2					
						.157	4,0					
Same as RDD 301 above except →						.078	2,0	<b>1859</b>	<b>1860</b>	RDD 301-2*	2509	DD 875-770
See table on page 4-10	various	.420- .450	10,8- 12,1	.875 w/ .770 flats	22,2 w/ 19,6 flats	.032	0,8	<b>1865</b>	<b>1866</b>	RDD 401	2509	DD 875-770
						.063	1,6					
						.099	2,5					
						.126	3,2					
						.157	4,0					
Same as RDD 401 above except →						.078	2,0	<b>1882</b>	<b>1883</b>	RDD 401-2*	2509	DD 875-770

Standard color black. Consult Heyco for white and other colors.  
\*Designed for cast or other mounting holes with rounded edges.

- **Assembly friendly!** Independent of insertion into the panel, RDD Lockit™ Strain Reliefs **self-lock** onto the cable. Preassemble RDD Lockits off line for final assembly at a later time or remote location, for lower installed cost!
- Install easily with fingertip pressure into a standard round or Double D hole. No tools required, even for hand assembly.
- Protect the lifeline of your electric/electronic products by absorbing the forces of push and pull that may be exerted on the flexible power cord. Double D design eliminates the possibility of part rotation under forces of twist.
- Multiple panel locking steps secure Lockit Strain Reliefs into a wide range of panel thicknesses for a **flush, finished fit**.
- Heyco's automated Pre-Assembly Equipment speeds assembly of the RDD onto the cable and thus lowers costs while greatly reducing risk of carpal tunnel syndrome. See pages 4-15 & 4-16.
- Consult Heyco for other wire types and sizes.
- See page 4-38 for corresponding **Mounting Hole Plugs** which can be used to fill blank/unused Mounting Holes and thus allow for a single panel design for multiple applications.

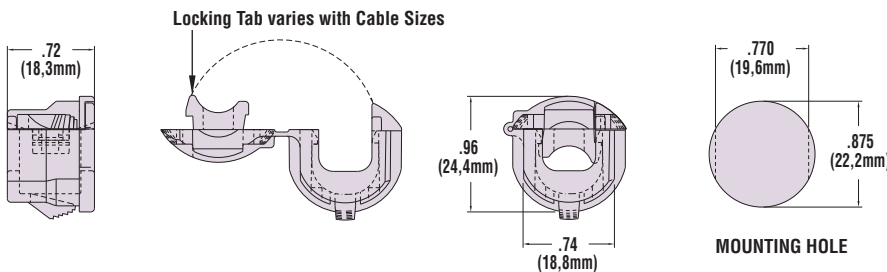

RDD 201, RDD 201-2, RDD 301, RDD 301-2, RDD 401, RDD 401-2

Material	Nylon 6/6
Certifications	Recognized under UL File E15331 Certified by the Canadian Standards Association File 8919
Flammability Rating	94V-2
Temperature Range	-04°F (-18°C) to 221°F (105°C)

Quick  
Specs