



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
 bhanlon@huesonwire.com

C5631

Issue Date: 4/7/2016

Construction

IEWC # 32012361

Issue: 2

Description: 5/C 18 16/30 TC AWM 2587 600V 90°C PVC/PVC		Diam. (In)
Component:	5 Conductors	
Conductor:	18 AWG 16/30 Tinned Copper to ASTM B-174	0.048"
Insulation:	0.010" Premium Grade PVC Insulation	0.068"
Color Code:	Black, Brown, Red, Orange, Yellow	0.068"
Cable Assembly:	5 Conductors Bunched Cabled	0.184"
Fillers	Fibrillated polypropylene or solid fillers for roundness (optional)	0.184"
Tape:	Polyester or Clear Mylar Separator Tape for Strip-Ability (optional)	0.184"
Jacket:	0.032" Premium Grade UL PVC	0.248"
Jacket Color:	Gray	0.248"

Print: E174416 RU AWM STYLE 2587 90C 600V ---- cRU AWM I/II A/B 90C 600V FT1

Specifications:	AWM Style	Temp	Voltage	Flame	
UL	AWM-2587	90°C	600	VW-1	
Canadian cRU	AWM	80°C	300	FT-1	I/II A/B

Environmental Compliance

- EU Directive 2011/65/EC(RoHS):
- REACH Regulation (EC 1907/2006):
- California Prop 65:

IQ160102


Ing. Alejandra Alarcon
 4/7/2016



Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 4/7/2016
Issue: 2

Drawing/Rotation:

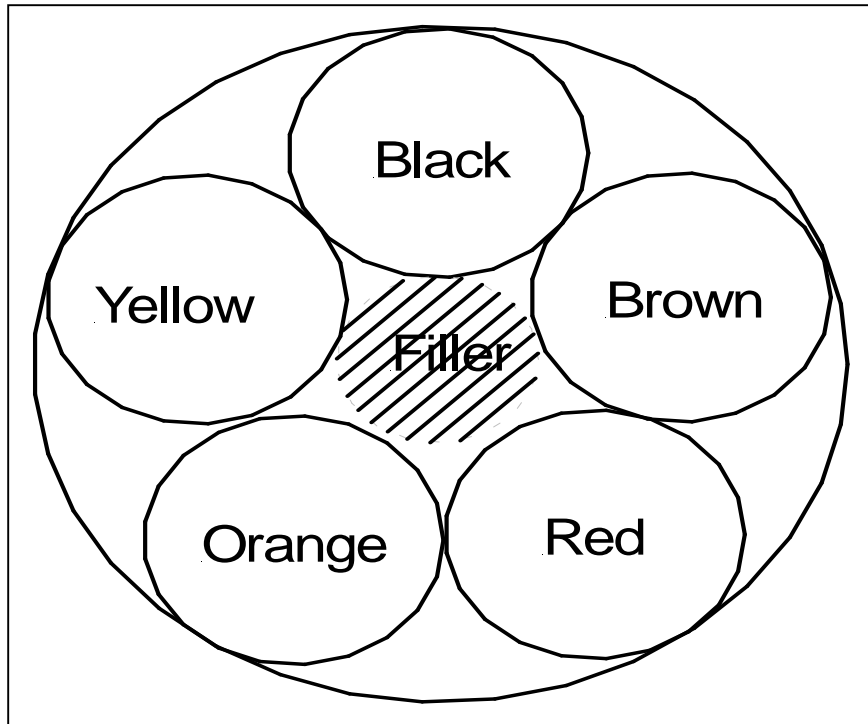

4/6/16: Changed color code

IQ160102

Ing. Alejandra Alarcon
4/7/2016