

Product Specification (4S11)

Canare Electric Co., Ltd

1. **Scope** This product specification covers the performance of the Loud Speaker cable.

2. General Specifications

(1) **Product Name** Speaker Cable

(2) **Model Name** 4S11

(3) **Construction and Appearance** As shown in Fig.1 and Table 1

Color of the Insulation

1	2	3	4
Red	White	Translucent Red	Translucent White

Fig. 1

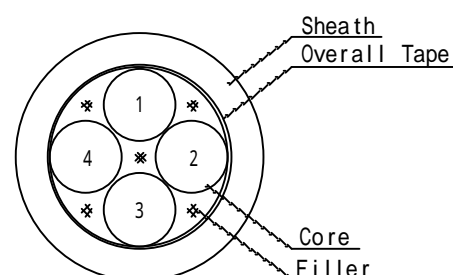


Table 1

Item	Standard Value	Note		
No. of Conductor	4	1 Quad		
Core	Inner Conductor	Construction (qty/mm)	41/0.26A	Annealed Copper 14AWG
		Nom. Cross Section Area(mm ²)	2.18	
		Outer Diameter (mm)	1.95	
	Insulation	Thickness (mm)	0.71	Polyethylene
Outer Diameter (mm)		3.37		
Strand	Pitch (mm)	100	Quad	
Filler	Material	Cotton		
Overall Tape	Thickness (mm)	0.06	Paper Tape	
	Outer Diameter (mm)	8.3		
Sheath	Thickness (mm)	1.2	PVC	
	Color	Grey, Black Custom colors available		
	Marking	Speaker Cable 4S11 CANARE <Year> MADE IN JAPAN		
Outer Diameter	10.7			

(4) **Weight** Approx. 16 kg / 100m

(5) **Package** 100m : Spool

Over 160m : Wooden reel

3. Rating, Standard

- (1) **Rated Voltage** AC60Vrms
 (2) **Temperature Range** -50 ~ +60

4. Electrical Characteristics

Item	Standard Value	Test Method
D.C. Resistance	$\leq 8.7 \text{ } \Omega/\text{km}$ (20 °C)	JIS C3005
Insulation Resistance	$\geq 1000 \text{ M}\Omega \cdot \text{km}$	JIS C3005
Voltage Proof	AC500V 1minute Not Breakdown	JIS C3005

5. Mechanical Characteristics

Item	Standard Value	Test Method	
Tensile properties of Sheath	Tensile strength	$\geq 11.0 \text{ Mpa}$	JIS C3005
	Elongation	$\geq 260 \%$	JIS C3005

6. Environment Characteristics

Item	Standard Value	Test Method
Flame Retardance	Flame must extinguish naturally within 60 seconds.	Perform inclination test according to JIS C3005.

Note: Testing must be performed under standard conditions set down in “JIS C 60068-1 General Environmental Testing Rules (Electric/Electronics).”

Standard Conditions: Unless otherwise specified, all tests and measurements should be performed within a normal temperature range of 15-35 °C, a relative humidity of 25-75%, and an atmospheric pressure of 86-106kPa.