

A01907

583980

EYP. NO. MX00A0002

SCALE FULL DO NOT SCALE

RELEASED MAX. TIME 32318 8-4-88

DIV	QTY	DIV	QTY
CME	MX	MX	V
AN	NC	NC	
AU	OA	OA	
BL	OF	OF	
CA	PU	PU	V
CU	RT	RT	
DS	FX	FX	
EV	SD	SD	
GA	TN	TN	V
JO	TW	TW	
LB	XW	XW	
LF			
LM			
			CCR

DRAWN BY L. M. S LAYOUT

CHECKED BY L. M. S

APPROVED BY [Signature]

NAME CABLE ASSEMBLY, 3 CONDUCTORS

MARINE ENGINEERING OUTBOARD MARINE CORP.

CONFIDENTIAL PROPRIETARY INFORMATION


USED BY SIMILAR

UNLESS OTHERWISE SPECIFIED:  
 ±.020 TOL. ON 2 PLACE DECIMALS  
 ±.010 TOL. ON 3 PLACE DECIMALS  
 ±.060 TOL. ON FRACTIONS  
 ZERO TOL. ON BASIC & 4 PLACE DEC.  
 ANGLE TOL = 1°  
 INTERPRETATIONS OF THIS DRAWING PER ANSI Y14 AND B46.1

DESIGNED FOR 174129

MATERIAL SEE DETAILS

BLACK VINYL EXTRUSION, 0.032 WALL THICKNESS TO FIT, TIGHTLY AROUND WIRES. PURPLE

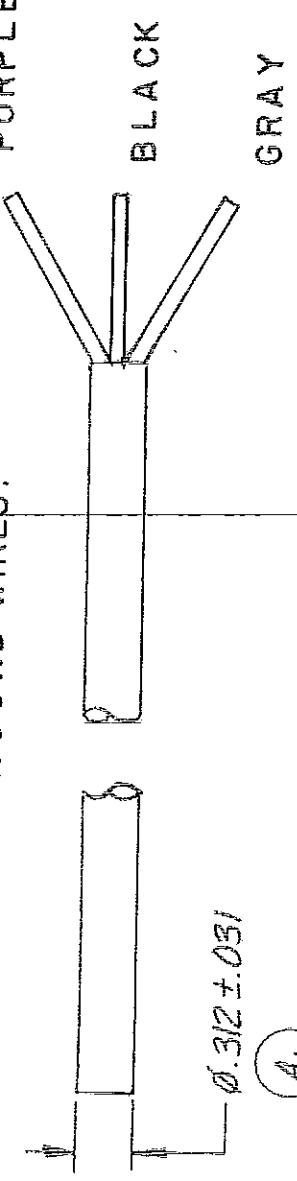

WIRE SPECIFICATIONS:  
 INSULATED WIRE MUST MEET SAE J 1128  
 16 GA. 19 STRANDS OF # 29 AWG. TINNED COPPER WIRE  
 60°C. MIN GPT INSULATION  
 PER. SAE J378b (NOV. 1976) O.D. 0.100-0.115

WN 31050

CHANGE NO	LETTER	DATE	BY
39540	A	2-16-89	[Signature]

0.312 ± 0.031-ADDED