



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com

Issue Date: 3/17/2016
Issue: 1

Construction

Description: 4/C 10 105/30 TC mPPE/mPPE		Diam. (In)
Component:	4 Conductors	
Conductor:	10 AWG 105/30 Tin Copper Smoothbunch	0.12"
Insulation:	0.012" mPPE UL Approved	0.144"
Color Code:	Black, Red, White, Green	0.144"
Cable Assembly:	4 Conductors Bunched Cabled	0.348"
Fillers:	Fibrillated polypropylene or solid fillers for roundness (optional)	0.348"
Tape:	Non-Woven Separator Tape for Strip-Ability	0.351"
Jacket:	0.035" mPPE Polyphyneylene	0.421"
Jacket Color:	Black	0.421"
Print:	E-174416 RU AWM 21819 105C 600V OR 21492 80C 300V VW-1 CLASS K C(RU) AWM I/II A/B FT1 600V 105C CE ROHS	

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>
UL	AWM-21819	105°C	600	VW-1
Canadian cRU	AWM	105°C	600	FT-1 I/II A/B

Environmental Compliance

- EU Directive 2011/65/EC(RoHS):
- REACH Regulation (EC 1907/2006):
- California Prop 65:

IQ160131




Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 3/17/2016

Issue: 1

Drawing/Rotation:

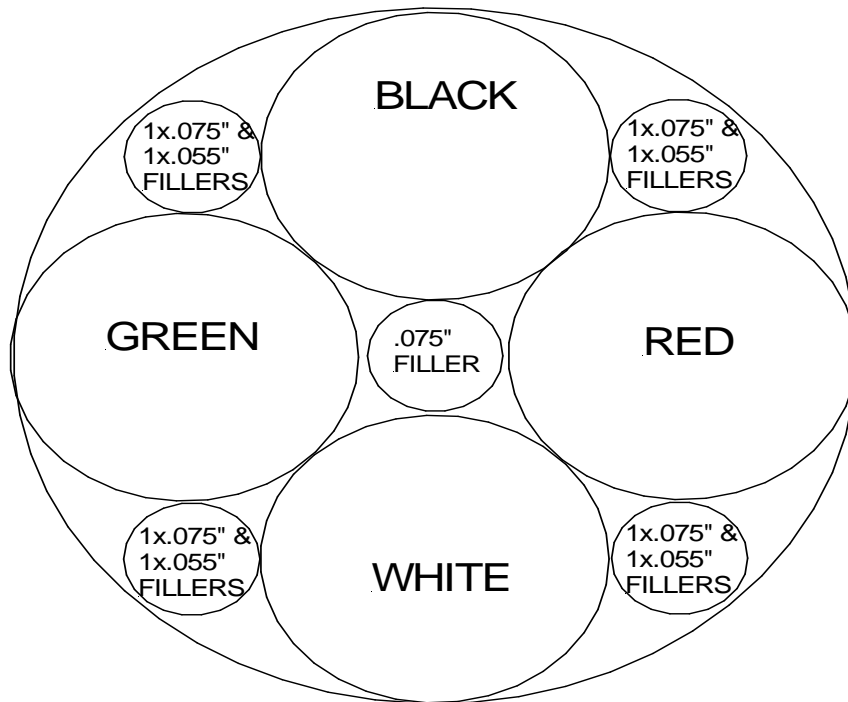

IQ160131