


**GeneralCable**  
**TWO CONDUCTOR #16AWG**  
**SHIELDED 125°C 600V**

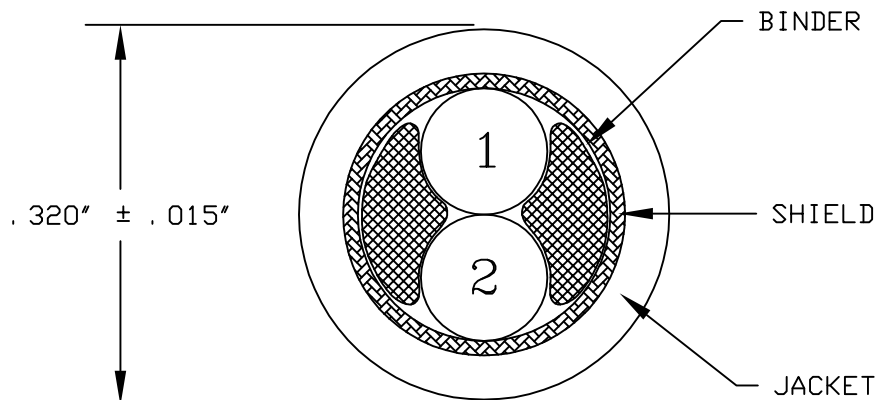

- COMPONENTS - CONDUCTOR: #16AWG 19/29 TINNED COPPER  
 (ITEMS 1-2) INSULATION: POLYRAD XT-.030" NOMINAL WALL  
 IRRADIATED CROSS-LINKED POLYOLEFIN  
 DIAMETER: .114" NOMINAL
- CABLE - TWO (2) COMPONENTS (ITEMS 1-2) + TWO (2) FLAME  
 RETARDANT FILLERS CABLED TOGETHER WITH A L. H. LAY
- BINDER - .001" MYLAR TAPE-25% MINIMUM OVERLAP
- SHIELD - #36AWG TINNED COPPER BRAID-85% MINIMUM COVERAGE
- JACKET - POLYRAD XT (BLACK)-.030" NOMINAL WALL
- DIAMETER - .320" NOMINAL
- TEMPERATURE - 125°C
- VOLTAGE - 600V
- NET CABLE WGT - 62 LBS/1000'
- JACKET PRINT - "GENERAL CABLE BRAND REX BRAND (WC) POLYRAD XT  
 125C 2/C 16AWG SHIELDED 600V YEAR/MONTH"

COLOR CODE -	ITEM NUMBER	COLOR
	1	WHITE
	2	RED

<b>REVISIONS</b>	O	06/09/03	FIRST ISSUE	<b>GeneralCable</b> 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u>	
	A	11/20/03	ADD PART NUMBER		
	B	02/23/12	UPDATE		
				DRAWING NO: 11-615	
<b>REFERENCES</b>	CONSTITUTION CABLE			DRAWN BY: CAD	APPROVED BY: M. LAJEUNESSE
	GeneralCable P/N 354480			THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	
	T-15399				