


This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 24/12 AWM 21984 105C (.40C) 300V	UNITS: IN	SCALE: 12:1
CUSTOMER: IEWC	NWI P/N: FAWM2412-028	DWG NO: 57604-4
CUSTOMER P/N: 32018967	DRAWN BY: DPLANGER	DATE: 5/16/2016
CORE DIMENSIONS FOR INTERNAL USE ONLY		REV: B

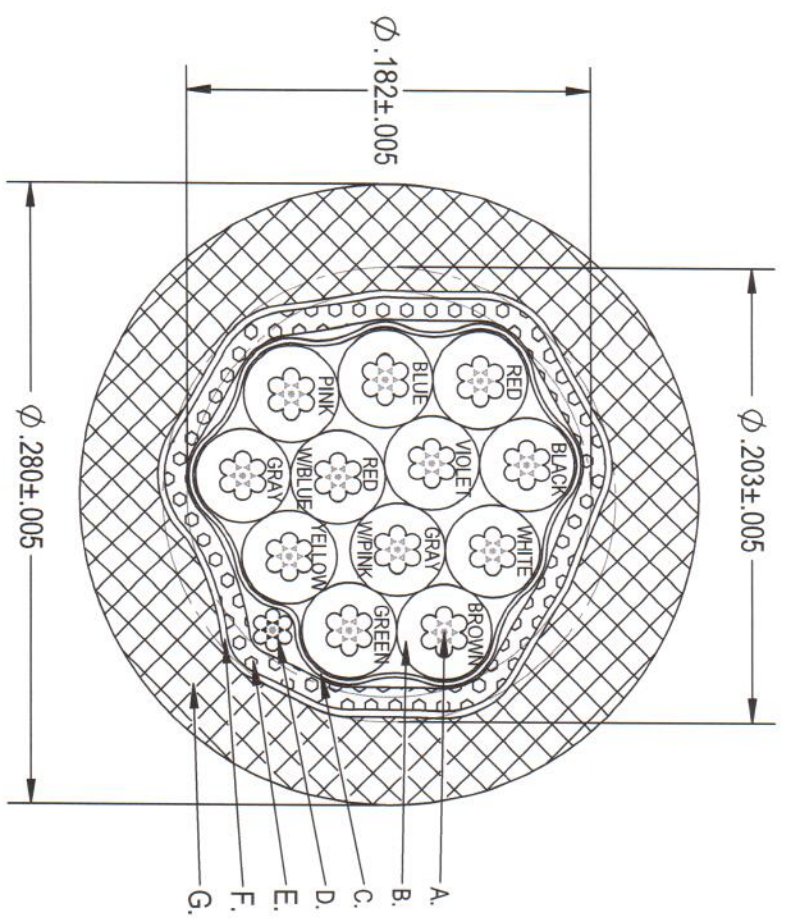

ITEM	SPECIFICATIONS
A.	24 GAUGE 7x.0076TC CONCENTRIC
B.	9 MIL PVC INSULATION PER UL AWM 1731 7 MIL MIN. PVC INSULATION .043 ± .002
C.	ALUMINUM FOIL SHIELD, FOIL OUT 25% MIN. OVERLAP 100% COVERAGE
D.	26 GAUGE 7x.0063TC DRAIN POSITION OF DRAIN MAY VARY
E.	70% MIN. TC BRAID SHIELD 36 GAUGE SINGLE ENDS
F.	TISSUE PAPER SEPARATOR
G.	30 MIL PRESSURED TPU JACKET 105C 300V 24 MIL MIN. BLACK POLYURETHANE JACKET UL RECOGNIZED AND CSA CERTIFIED

LEGEND SPECIFICATIONS WHITE INK PRINT
 OSCEOLA: RU AWM E54631 105C 300V CSA AWM LL54185 III AB 105C 300V FT1
 SANTA TERESA: RU AWM E54661-02 105C 300V "CSAC/US" AWM LL54185 (02) III AB 105C 300V FT1