



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com

CA-8018
C5685

Issue Date: 8/29/2016
Issue: 1

Construction

Description: 7/C 24 (19) TC Triad + 4/C 20 (19) TPE/PUR (No Braid)		Diam. (In)
Component #1	3 Conductors	
Conductor	24 AWG 19/36 Tinned Copper to ASTM B-8	0.024"
Insulation:	0.01" TPE - Thermoplastic Elastomer	0.044"
Color Code:	Black, White, Green, Brown, Red, Orange, Yellow	0.044"
Component #1	4 Conductors	
Conductor	20 AWG 19/32 Tinned Copper to ASTM B-8	0.038"
Insulation:	0.01" TPE - Thermoplastic Elastomer	0.058"
Color Code:	Brown, Red, Orange, Yellow	0.058"
Cable Assembly A:	Bunch Cable: 3/C 24(19) Black, White, Green with Edge Free Overall Foil (in) & TC24/19 Drain (in)	0.095"
Cable Assembly B:	Cable: Twisted, Shielded Triad with 4/C 20 (19) Brn, Red, Org, Yel	0.185"
Fillers	Fibrillated polypropylene or solid fillers for roundness (optional)	0.185"
Braid:	Tinned Copper Braid Shield 8 Ends #36 AWG 9 PPI 95% Coverage	0.208"
Jacket:	0.032" Polyurethane Lubrizol #58202 Matte Finish	0.272"
Jacket Color:	Red Color Resource XLP-5850 Super Red	0.272"

Print: SCHMITT INDUSTRIES, INC, www.schmitt-ind.com CA-8018
 White Ink

Specifications:

Environmental Compliance

- EU Directive 2011/95/EC(RoHS):
- REACH Regulation (EC 1907/2006):
- California Prop 65:

IQ160356




Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 8/29/2016

Issue: 1

Drawing/Rotation:

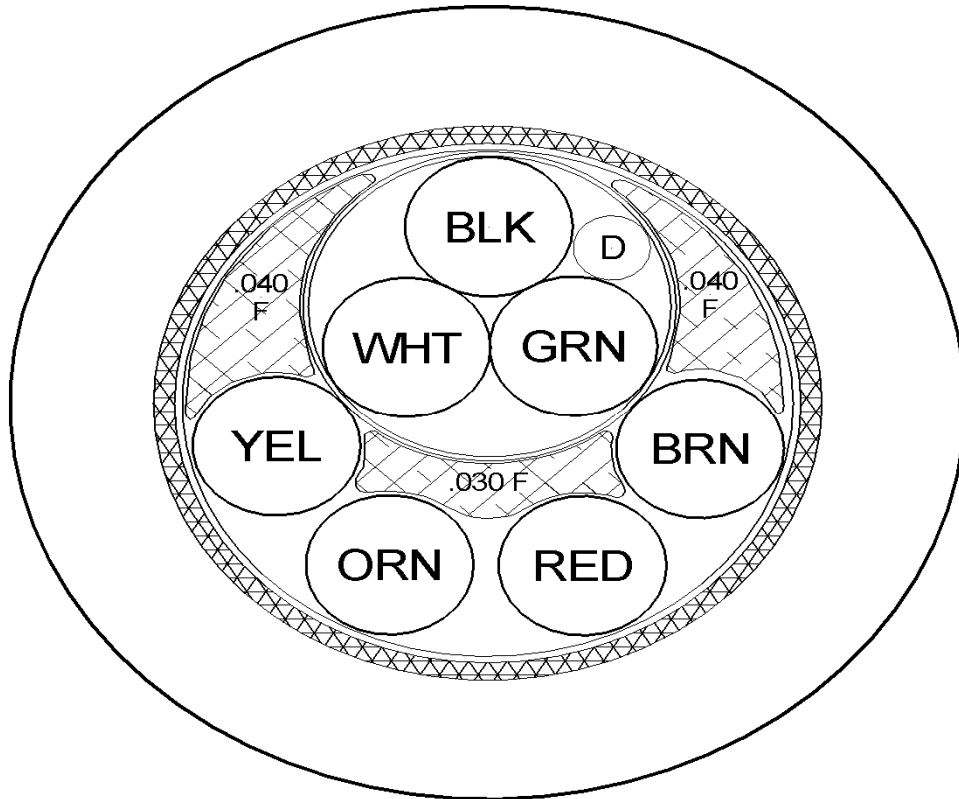

IQ160356