



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com

C5686
 CA-8019

Issue Date: 8/29/2016
 Issue: 1

Construction

Description: 2/C 26 19/38 TC TPE/PUR OAFS + Braid		Diam. (In)
Component:	2 Conductors	
Conductor:	26 AWG 19/38 Tinned Copper to ASTM B-8	0.02"
Insulation:	0.01" TPE - Thermoplastic Elastomer	0.04"
Color Code:	Black, Red	0.04"
Cable Assembly:	2 Conductors Bunched Cabled	0.08"
Drain Wire:	26 AWG 19/38 Tinned Copper to ASTM B-8	0.08"
Shield:	Aluminum Mylar Foil Shield	0.083"
Tape:	Clear Mylar Separator Tape	0.083"
Braid:	Tinned Copper Braid Shield 5 Ends of #36 AWG TC 11.9 PPI 95% Coverage	0.105"
Jacket:	0.040" Polyurethane Lubrizol #58202 Matte Finish	0.185"
Jacket Color:	Red Color Resources XLP-5850 Super Red	0.185"
Print: White Ink	SCHMITT INDUSTRIES, INC www.schmitt-ind.com CA-8019	

Specifications:

Environmental Compliance

- EU Directive 2011/95/EC(RoHS):
- REACH Regulation (EC 1907/2006):
- California Prop 65:


IQ160357



Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 8/29/2016
Issue: 1

Drawing/Rotation:

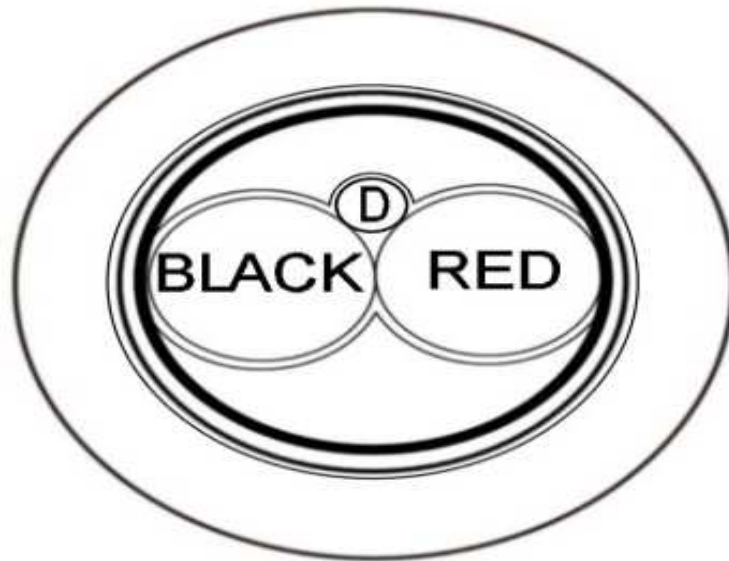

IQ160357