



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com

C5689

Issue Date: 9/9/2016
 Issue: 1

Construction

Description: 2/PR 16 26/30TC PVC/PVC OAFS + Drain Wire		Diam. (In)
Component:	Conductors	
Conductor:	16 AWG 26/30 Tinned Copper to ASTM B-174	0.066"
Insulation:	0.014" Premium Grade PVC	0.094"
Color Code:	Black, Orange, Yellow, Red	0.094"
Cable Assembly:	Twist to 2 Pairs Pair #1: (Black + Orange), Pair #2 (Yellow + Red + Drain)	.155"
Cable Assembly:	Bunch Cable The Two Twisted Pairs and Pull in Aluminum Foil Shield	.300"
Drain Wire:	20 7/28 TC	.300"
Shield:	Aluminum Mylar Foil Shield	.303"
Jacket:	0.032" AWM Jacket Compound	.360" max
Jacket Color:	Gray	0.360" max

Print: E174416 RU AWM-2464 80C 300V VW1 --- cRU AWM I/II A/B 80C 300V FT-1
 White Ink

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>	
UL	AWM-2464	80°C	300	VW-1	
Canadian cRU	AWM	80°C	300	FT-1	I/II A/B

Environmental Compliance

- EU Directive 2011/95/EC(RoHS):
- REACH Regulation (EC 1907/2006):
- California Prop 65:


IQ160373



Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 9/9/2016
Issue: 1

Drawing/Rotation:

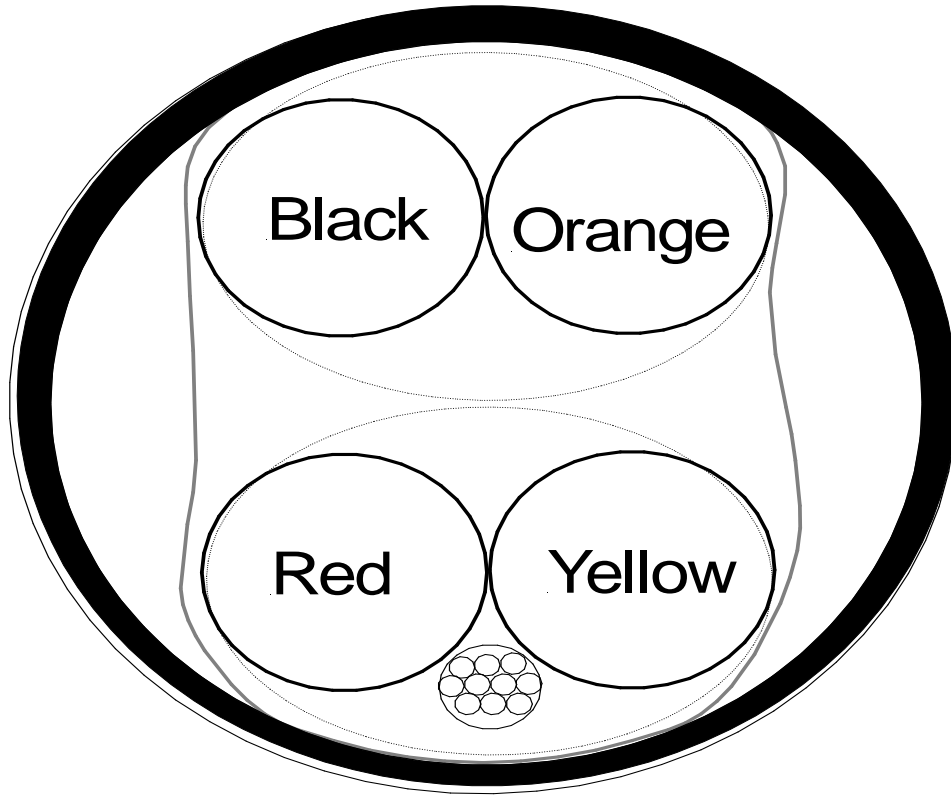

IQ160373