

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 18/3 SJTW 60C 300V

CUSTOMER: IEWC

CUSTOMER P/N: 32025467

CORE DIMENSIONS FOR INTERNAL USE ONLY

UNITS: IN SCALE: 12:1

DWG NO: 64791-1



DATE: 10/3/2016

REV: B

NWI P/N: FSJT183-282N

DRAWN BY: DP LANGER

ITEM	SPECIFICATIONS
A.	18 GAUGE 16x30BC BUNCHED
B.	30 MIL PVC INSULATION 60C 300V 27 MIL MIN. PVC INSULATION O.D. : 110 ±.002 STANDARD SJT CONDUCTOR
C.	POLY FILLER
D.	TISSUE PAPER SEPARATOR
E.	30 MIL PRESSURED PVC JACKET 60C 300V 24 MIL MIN. PVC JACKET BLACK JACKET UL LISTED AND CSA CERTIFIED

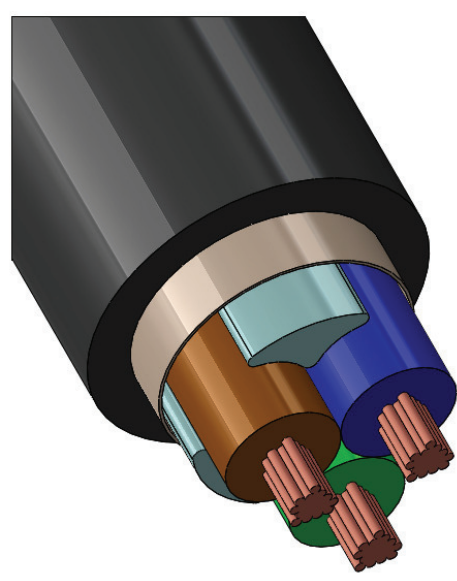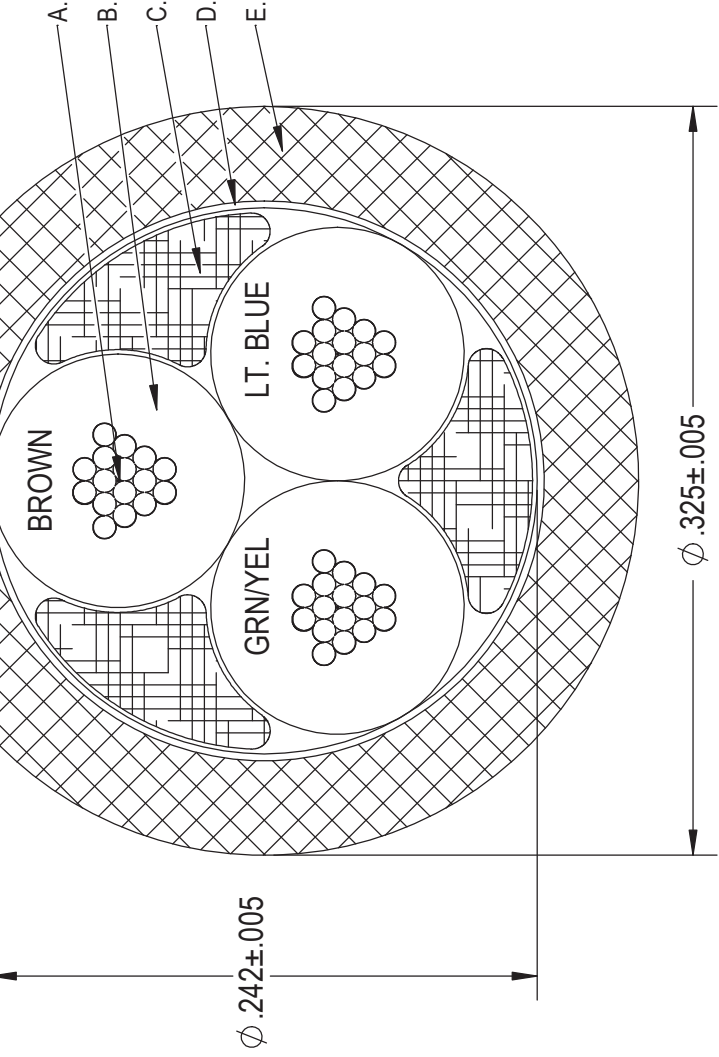

LEGEND SPECIFICATIONS
NORTHWIRE INC.-02 (UL) 3/C 18 AWG (.824mm²) SJTW 60C 300V FT2 CSA



DESCRIPTION: 18/3 SJTW 60C 300V

CUSTOMER: IEWC

CUSTOMER P/N: 32025467

NWI P/N: FSJT183-282N

DRAWN BY: DP LANGER

UNITS: IN SCALE: 60:1

DWG NO: 64791-1

DATE: 10/3/2016 REV: B

ELECTRICAL REQUIREMENTS

NONE SPECIFIED

MECHANICAL REQUIREMENTS

NONE SPECIFIED



REVISIONS			
Corrected conductor colors	B	10/5/16	MK
INITIAL RELEASE	A	10/3/16	DPL
REVISION RECORD	REV.	REV DATE	APR