


# CG 350 METRIC & PG STAINLESS STEEL CABLE GLANDS

## Metric & PG thread

Impact resistant, suitable for industrial and food and beverage applications, water tight, corrosion resistant.

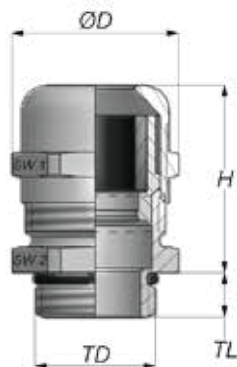

### Technical Details

Material	Stainless steel (AISI 303) or (AISI 316L)
Clamping Insert	Polyamide 6
Seal	Chloroprene (CR)
O-Ring	Neoprene (NBR)
Protection Class	IP 68 - 5 Bar
Temperature Range	-20°C to +100°C permanent -40°C to +150°C intermittent
Flammability	V2 (According to UL 94)
Approvals	UR, UL, VDE

Part Number	Thread Type	Clamping Range Ø min-max		Thread Diameter (TD)		Wrenching Flats Cap (SW1)		Thread Length (TL) mm	Height (H) mm	UL <sup>1</sup>	
		inches	mm	inches	mm	inches	mm				
SS 303	SS 316										
<b>Metric</b>											
SM3-12	SM6-12	M12x1.5	.118 - .256	3.0 - 6.5	0.472	12.0	0.551	14	6.0	21.5	UR
SM3-16	SM6-16	M16x1.5	.157 - .315	4.0 - 8.0	0.630	16.0	0.669	17	7.0	23.0	-
SM3-20	SM6-20	M20x1.5	.236 - .473	6.0 - 12.0	0.787	20.0	0.866	22	8.0	24.3	UL
SM3-25	SM6-25	M25x1.5	.394 - .551	10.0 - 14.0	0.984	25.0	0.945	24	8.0	27.6	-
SM3-32	SM6-32	M32x1.5	.512 - .709	13.0 - 18.0	1.260	32.0	1.181	30	9.0	31.2	-
SM3-40	SM6-40	M40x1.5	.709 - .984	18.0 - 25.0	1.575	40.0	1.614	41	9.0	38.5	-
SM3-50	SM6-50	M50x1.5	.866 - 1.260	22.0 - 32.0	1.969	50.0	1.969	50	9.0	47.3	-
SM3-63	SM6-63	M63x1.5	1.339 - 1.732	34.0 - 44.0	2.480	63.0	2.559	65	14.0	50.3	UL
<b>PG†</b>											
SP3-7	SP6-7	PG 7	.118 - .256	3.0 - 6.5	0.492	12.5	0.551	14	6.0	21.8	-
SP3-9	SP6-9	PG 9	.157 - .315	4.0 - 8.0	0.598	15.2	0.669	17	6.0	22.6	-
SP3-11	SP6-11	PG 11	.197 - .394	5.0 - 10.0	0.732	18.6	0.866	22	6.0	25.3	-
SP3-13	SP6-13	PG 13.5	.236 - .472	6.0 - 12.0	0.803	20.4	0.866	22	6.5	24.1	-
SP3-16	SP6-16	PG 16	.394 - .551	10.0 - 14.0	0.886	22.5	0.945	24	6.5	27.5	-
SP3-21	SP6-21	PG 21	.512 - .709	13.0 - 18.0	1.114	28.3	1.181	30	7.2	31.2	-
SP3-29	SP6-29	PG 29	.709 - .984	18.0 - 25.0	1.457	37.0	1.614	41	8.0	39.3	-
SP3-36	SP6-36	PG 36	.866 - 1.261	22.0 - 32.0	1.850	47.0	1.969	50	9.0	47.2	-
SP3-42	SP6-42	PG 42	1.181 - 1.496	30.0 - 38.0	2.126	54.0	2.362	60	12.0	47.7	-
SP3-48	SP6-48	PG 48	1.339 - 1.732	34.0 - 44.0	2.335	59.3	2.559	65	14.0	52.0	-

<sup>1</sup> Additional UL approval in progress

† PG is not VDE approved

Stainless steel locknut available upon request