


DATE:	10/7/2016	2C12BS-1581			REVISION:	A
-------	-----------	-------------	--	--	-----------	---

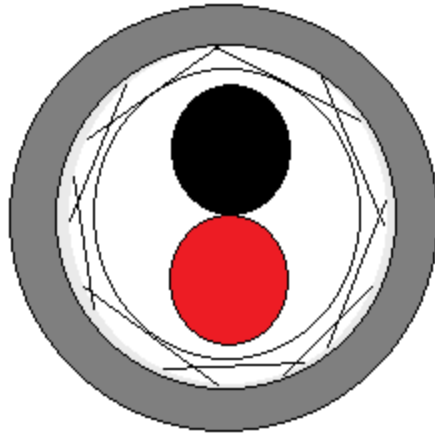

DESCRIPTION: TWO CONDUCTORS 12 AWG, BRAID SHIELD, GRAY JACKET

CONDUCTOR: #12 65/30 TINNED COPPER

INSULATION: .016" PVC (PER UL AWM 1581 & UL AWM 1569)

CONSTRUCTION: TWO (2) CONDUCTORS CABLED TOGETHER WITH FILLERS  
CC: 1) RED 2) BLACK

SEPARATOR: CLEAR POLYESTER TAPE

SHIELD: TINNED COPPER BRAID, 85% MINIMUM COVERAGE

JACKET: .035" CHROME GRAY PVC

OD: .345" NOMINAL

BEND RADIUS: 3.4"

JACKET PRINT  
IN BLACK INK: E151405 12 AWG TYPE CM 90C (UL)...AWM 2464 80C 300V...ROHS...CE

CABLE RATINGS: -20C TO +90C (90C CM / 80C 2464)  
300V  
ROHS COMPLIANT  
CE COMPLIANT



# CABLE TECHNOLOGY, INC.

73 RIVER ROAD - WILLINGTON, CT 06279 - (860) 429 - 7889 FAX (860) 429 - 3615

PART NO: TBD

REVISION: A

ROHS COMPLIANT