

Right Angle Shapes, VG style/MIL style

- Helashrink 1100 Series, with rib, low profile


This style is typically used on airborne harnesses to achieve light weight, low profile, compact strain relief and mechanical protection.



1123-1-G supplied / fully recovered.



a: Expanded form (supplied)

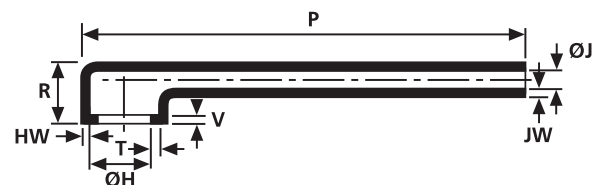

b: Fully recovered form (after heating)

Sizes and Type Table

Type	Designation as per VG-Norm	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	HW ± 20%	JW ± 30%	T ± 10%	V ± 10%
1121-1	VG95343T06F001A	22.0	12.0	22.0	6.5	70.0	19.0	1.5	1.1	1.0	3.0
1122-1	VG95343T06F002A	25.5	15.0	25.0	7.5	79.0	20.0	1.5	1.1	1.0	3.0
1123-1	VG95343T06F003A	29.0	19.0	29.0	8.5	89.0	21.0	1.8	1.1	1.0	3.0
1124-1	VG95343T06F004A	34.0	23.0	34.0	10.0	102.0	22.0	1.8	1.1	1.0	3.0
1125-1	VG95343T06F005A	37.0	30.0	37.0	11.0	108.0	24.0	2.0	1.1	1.7	3.0
1126-1	VG95343T06F006A	43.5	34.0	43.5	12.0	121.0	27.0	2.0	1.1	1.7	3.0
1127-1	VG95343T06F007A	50.0	41.5	50.0	14.5	132.0	30.0	2.3	1.4	1.7	3.0
1128-1	VG95343T06F008A	62.5	47.0	62.5	18.0	133.0	33.0	2.5	1.4	2.0	3.0
1129-1	VG95343T06F009A	69.0	60.0	69.0	20.0	137.0	35.0	2.5	1.4	2.0	3.0
1141-1	VG95343T06F010A	82.0	67.0	82.0	23.0	140.0	45.0	2.5	1.4	2.0	3.0
1121-4	–	22.3	11.4	22.3	6.4	105.2	18.5	1.5	1.1	1.0	3.3
1122-4	–	25.6	15.0	25.6	7.5	124.0	19.8	1.5	1.1	1.0	3.3
1123-4	–	29.4	19.0	29.4	8.5	146.3	20.8	1.8	1.1	1.0	3.3
1124-4	–	34.0	22.9	34.0	10.0	172.2	21.8	1.8	1.1	1.0	3.3
1125-4	–	29.5	37.3	37.3	11.0	185.2	24.4	2.0	1.1	1.7	3.3
1125-2	–	41.2	29.5	41.2	11.0	82.0	24.4	2.0	1.1	1.7	3.3
1126-4	–	43.7	34.0	43.7	12.0	213.6	27.0	2.0	1.1	1.7	3.3
1127-4	–	50.0	41.1	2.3	14.5	224.5	9.5	2.3	1.4	1.7	3.3
1127-3	–	50.0	41.1	2.3	14.5	65.0	29.5	2.3	1.4	1.7	3.3
1128-4	–	62.7	47.0	62.7	18.0	227.3	33.3	2.5	1.4	2.0	3.3
1129-4	–	69.3	59.7	69.3	20.0	233.4	35.1	2.5	1.4	2.0	3.3

All dimensions in mm. Subject to technical changes.