



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com

Issue Date: 12/2/2016
Issue: 1

Construction

Description: 2/C 18 16/30 TC PVC/PVC		Diam. (In)
Component:	2 Conductors	
Conductor:	18 AWG 16/30 Tinned Copper to ASTM B-174	0.048"
Insulation:	0.01" Premium Grade PVC	0.068"
Color Code:	Red, Black	0.068"
Cable Assembly:	2 Conductors Bunch Cabled	0.136"
Fillers:	Fibrillated polypropylene or solid fillers for roundness	0.136"
Tape:	Non-Woven Separator Tape for Strip-Ability (optional)	0.136"
Jacket:	0.032" AWM Jacket Compound	0.200"
Jacket Color:	Gray	0.200"

Print: E174416 RU AWM-2464 80C 300V VW1 --- cRU AWM I/II A/B 80C 300V FT-1

Specifications:	AWM Style	Temp	Voltage	Flame	
UL	AWM-2464	80°C	300	VW-1	
Canadian cRU	AWM	80°C	300	FT-1	I/II A/B

Environmental Compliance

- EU Directive 2011/95/EC(RoHS):
- REACH Regulation (EC 1907/2006):
- California Prop 65:


IQ160473



Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 12/2/2016
Issue: 1

Drawing/Rotation:

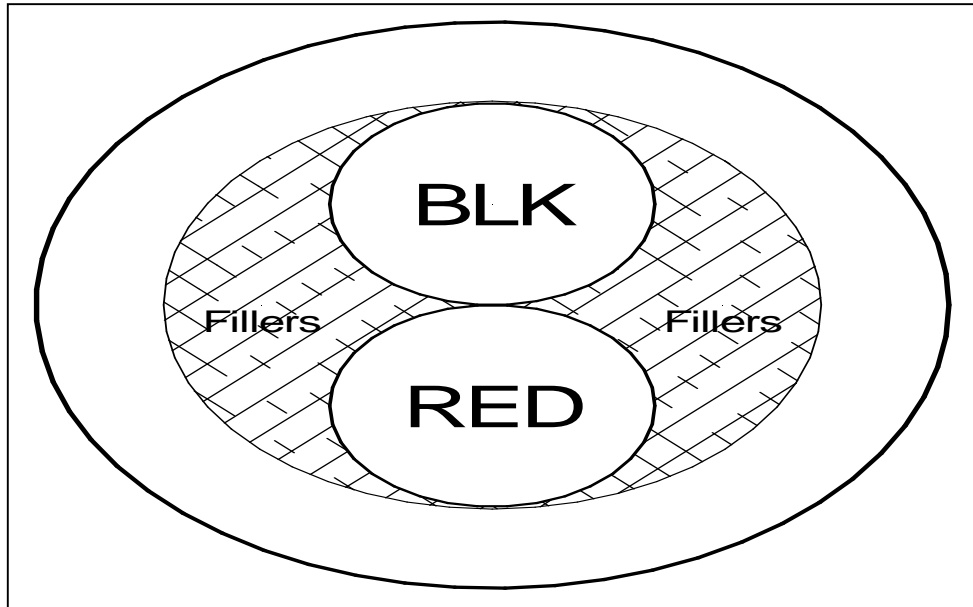

IQ160473