


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
7/27/2004	A	5807	SPECIFICATION CREATED

Parent Number: F02031-

Description: 2 133/.0220 BC STX per J1127 MS-8288

DIAMETER: 0.418
TOLERANCE ± : 0.012

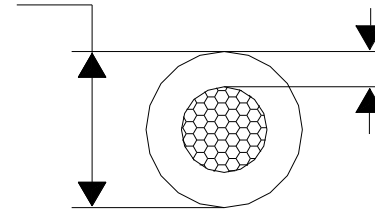

NOM WALL: 0.044
MINIMUM WALL: 0.036

Stranding: 133/.0220 BC LHL

Style: STX per SAE J1127, MS-8288

Insulation: XLPE

Print Legend: NO PRINT

Voltage: Per SAE J 1127 this product is intended for use at a nominal system voltage of 60 Volts DC or less in surface vehicle electrical systems.

Temperature: The Temperature Class Rating is 125C. The Temperature Class rating is defined by SAE as " a class designation based on the retention of mechanical properties after 168 hours of aging at 30C above the temperature class rating".

Notes: 1. PAPER SEPARATOR IS USED BETWEEN THE CONDUCTOR AND INSULATION.

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Southwire's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Southwire or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Southwire's standard terms and conditions contained therein, including without limitation Southwire's standard warranty. Southwire disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without written consent of Southwire Company, LLC.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____

Title: _____

APPROVED

By Rob Brophy at 1:52 pm, Jun 09, 2017

Date:

Company Name:



Copperfield[®]

1115 W. North Street
Bremen, IN 46506
Phone: 1-574-546-5115